

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL

Document Metadata Overview	
Document Name:	Hertzler Tailings Operations, Maintenance and Surveillance (TOMS) Manual
Document Owner:	Environmental Sustainability Manager - US Region

Document Control Information			
Effective from	Version Number	Amendment Details	Amended By
2021/04/28	V1.5	Updated for Existing Operations	Knight Piésold Ltd.
2022/12/22	V1.6	General Update	Knight Piésold Ltd.
2025/07/07	V1.7	General Update	Knight Piésold Ltd.

Approval - Version 1.7			
Approvals	Title	Signature	Date Signed



COMMITMENT



ACCOUNTABILITY



RESPECT



ENABLING



SAFETY

Stillwater Mine

Hertzler Tailings Operations, Maintenance and Surveillance (TOMS) Manual

2025/07/07



CONFIDENTIALITY STATEMENT

This report has been prepared for the sole and exclusive use of the Sibanye-Stillwater. Therefore, it may not be made available to anyone other than authorized persons within Sibanye-Stillwater, or relied upon by any third party. No part of this work may be reproduced or transmitted in any form by any means, electronic or mechanical, including photocopying and recording, or by information storage or retrieval systems except as permitted, in writing by Sibanye-Stillwater.



COMMITMENT



ACCOUNTABILITY



RESPECT



ENABLING



SAFETY

TABLE OF CONTENTS

1.0	Introduction.....	7
1.1	Scope and Objectives of Manual.....	7
1.2	Roles and Responsibilities	7
1.2.1	Stillwater Mine Site Personnel	7
1.2.2	Engineer of Record (EOR) and Third-Party Consultants	10
1.2.3	Regulatory Agencies.....	11
1.3	Training	12
1.4	Control and Revisions to the Manual.....	12
1.4.1	Distribution	12
1.4.2	Revisions.....	13
1.5	Reference Documents	13
1.6	Regulatory Requirements.....	13
1.7	Independent Tailings Review Board	13
1.8	Independent Review Panel	14
2.0	Description of the Tailings Storage Facility	15
2.1	General	15
2.2	Project Description	15
2.2.1	Site Location.....	15
2.2.2	Project History.....	15
2.2.3	Process Description.....	15
2.2.4	Tailings Management.....	19
2.3	Design Basis and Operating Criteria	19
2.3.1	Overview.....	19
2.3.2	Tailings Embankment.....	22
2.3.3	Tailings Basin	22
2.3.4	Seepage Collection System.....	23
2.3.5	Tailings Delivery System	23
2.3.6	Water Reclaim System	24
2.3.7	Land Application and Disposal (LAD) System and Percolation Ponds.....	24
2.3.8	Mechanical Evaporation.....	24
2.4	Water Management	25
2.4.1	General	25
2.4.2	Water Balance	25
2.5	Closure Plan	25

3.0	Operations, Maintenance and Surveillance	27
3.1	Introduction.....	27
3.2	Tailings Embankment	28
3.2.1	Overview.....	28
3.2.2	Surveillance and Maintenance	28
3.3	Tailings Basin.....	29
3.3.1	Operational Objectives	29
3.3.2	Surveillance and Maintenance	29
3.4	Seepage Collection System	30
3.5	Tailings Delivery System.....	30
3.5.1	Operational Objectives	30
3.5.2	Surveillance and Maintenance	31
3.6	Water Reclaim System	31
3.6.1	Operational Objectives	31
3.6.2	Surveillance and Maintenance	31
3.7	Instrumentation.....	32
3.7.1	Operational Objectives	32
3.7.2	Surveillance and Maintenance	32
3.8	LAD Storage Pond.....	33
3.8.1	Operational Objectives	33
3.8.2	Surveillance and Maintenance	33
3.9	Surface Water Management	33
4.0	Safety Inspections, Reporting and Reviews	34
4.1	Quarterly and Annual Inspections	34
4.2	Independent Reviews.....	35
5.0	Emergency Preparedness Plan	36
5.1	General	36
5.2	Dam Breach Runout	36
5.3	Emergency Conditions	36
6.0	References	37
7.0	Certification.....	38

TABLES

Table 1.1	Stillwater Mining Company - Personnel - Roles and Responsibilities	9
Table 1.2	Stillwater Personnel - Roles and Responsibilities.....	11
Table 2.1	Key Design and Operating Parameters	20
Table 4.1	Independent Review Summary.....	35

FIGURES

Figure 1.1	Organization and Responsibilities Chart.....	8
Figure 1.2	TOMS Manual Location on FULCRUM.....	13
Figure 2.1	Site Location	16
Figure 2.2	Hertzler TSF - General Arrangement and Instrumentation Locations.....	17
Figure 2.3	Process Flow Sheet	18

APPENDICES

Appendix A	Quick Reference Field Guide
Appendix B	References
Appendix C	Inspection and Surveillance
Appendix C1	Inspection and Surveillance Schedule
Appendix C2	Unusual Events and Occurrences Requiring Non-Routine Walkovers
Appendix C3	Inspection Forms
Appendix D	Selected Site Photos
Appendix E	Tailings Deposition Plan

ABBREVIATIONS

CAP	Corrective Action Plan
CFR	Code of Federal Regulations
CORP	Consolidated Operations and Reclamation Plan
DBA	Dam Breach Assessment
DEQ	Department of Environmental Quality
DSR	Dam Safety Review
EOR	Engineer of Record
EPP	Emergency Preparedness Plan
GCL	geosynthetic clay liner
GISTM	Global Industry Standard on Tailings Management
GM	General Manager
GPS	Global Positioning System
GTMS	Group Tailings Management System
IRP	Independent Review Panel
ITRB	Independent Tailings Review Board
KP	Knight Piésold Ltd.
LAD	Land Application and Disposal
MCA	Montana Code Annotated
MDEQ	Montana Department of Environmental Quality
Mine Act	Federal Mine Safety and Health Act
MSHA	Mine Safety and Health Administration
MT	Montana
PMF	Probable Maximum Flood
QPP	Quantitative Performance Parameters
QRFG	Quick Reference Field Guide
ROD	Records of Decision
RTFE	Responsible Tailings Facility Engineer
SMC	Stillwater Mining Company
Stillwater	Sibanye Stillwater
SWM	Stillwater Mine
SWPPP	Storm Water Pollution Prevention Plan
TOMS	Tailings Operations, Maintenance and Surveillance
tpd	tons per day
TSF	Tailings Storage Facility
UAV	Unmanned Aerial Vehicles
USFS	United States Department of Agriculture, Forest Service
VP	Vice President
VWP	vibrating wire piezometer

1.0 INTRODUCTION

1.1 SCOPE AND OBJECTIVES OF MANUAL

Sibanye Stillwater (Stillwater) owns and operates the Stillwater Mine (SWM), a platinum group metal mine located in south central Montana. The SWM consists of an underground mine, a concentrator, two tailings storage facilities (TSF): the Hertzler TSF and the Nye TSF, and ancillary facilities. This Tailings Operations, Maintenance and Surveillance (TOMS) Manual has been prepared for the Hertzler TSF and its associated facilities. A separate standalone TOMS Manual has been prepared for the Nye TSF (Stillwater, 2025b). This Hertzler TOMS Manual has been developed to meet the requirements of the Montana State Law as defined in Montana Code Annotated (MCA) Title 82 Chapter 4 Part 3 (MCA 82-4-379) (MT, 2024).

The objectives of this TOMS Manual include:

- Define the roles and responsibilities of Stillwater site personnel, third-party consultants, and government (Section 1.2)
- Define the training requirements for those involved in the operation, maintenance and surveillance of the facility (Section 1.3)
- Outline the document control and revision procedures (Section 1.4)
- Provide an overview of the key components of the facility and operating, maintenance and surveillance requirements (Sections 2 and 3)
- Define the surveillance, inspection, reporting and review requirements (Section 4)
- Present the Emergency Preparedness Plan (Section 5)

Appendix A provides a Quick Reference Field Guide (QRFG) for the operation of the TSF. The QRFG includes the Quantitative Performance Parameters (QPPs) and key information for the operation, monitoring and inspection of the tailings impoundment.

Reference documents for the Hertzler TSF are listed in Appendix B.

Appendix C includes the inspection schedules and the inspection log templates. These templates are to be utilized for daily data collection, and for information gathered during the routine inspections.

1.2 ROLES AND RESPONSIBILITIES

The following provides an overview of the responsibilities of Stillwater site personnel and third-party consultants, as well as the role of the Montana Department of Environmental Quality (DEQ) and other government agencies.

1.2.1 STILLWATER MINE SITE PERSONNEL

The General Manager (GM) & Vice President (VP) of SWM Operations has the ultimate responsibility for the safety of the Hertzler TSF. The Concentrator Manager has been designated as Safety Manager for the TSF and is the primary contact for all matters relating to the operation, maintenance and surveillance of the facility. The Concentrator Manager reports to the GM of SWM Operations and is responsible for the day-to-day operations of the Hertzler TSF.

Figure 1.1 Organization and Responsibilities Chart

Table 1.1 Stillwater Mining Company - Personnel - Roles and Responsibilities

Position	Responsibilities
General Manager and VP of SWM Operations	Provide oversight and leadership of all activities required for the safe and socially responsible operation of the mine site. Overall project review and implementation, and budget allocation.
Corporate Environmental Affairs Manager	- Provide oversight and leadership of all activities required for the socially and environmentally responsible operation of the mine site - Communications with Government Agencies and Stakeholders
Environmental Sustainability Manager (Responsible Tailings Facility Engineer (RTFE))	- Accountable for the integrity of the tailings facility (Requirement 8.5) - Responsible for liaising with EOR, operations, planning, regulatory affairs, social performance and environment teams (Requirement 8.5) - Responsible for implementation of the design - Accountable for the establishment of a change management system (Requirement 6.5) - Responsible for the monitoring system and communication of the results to the EOR, including performance reviews (Requirements 7.2, 7.3) - Responsible, with the EOR, for the Construction Records Report (Requirement 6.3) - Responsible for the OMS Manual (Requirement 6.4)
Concentrator Manager	- Person responsible for the safe operation of the TSF including overall operations, maintenance and surveillance and TOMS Manual updates and review - Plan, coordinate, supervise, direct and review all activities related to the TSF construction and operation, tailings delivery and water reclaim, TSF water balance, and Emergency Preparedness Plan (EPP) - Overall operations of the concentrator and supervision of concentrator personnel - Overall concentrator operations contact responsible for Tailings Delivery System and Water Reclaim System. - Person responsible for inspection, maintenance, review and oversight of all areas of the tailings management and water reclaim operations, including tailings deposition, Tailings Delivery System, Water Reclaim System and Basin Underdrains - Quarterly Dam Safety Inspections for the TSF - Responsible for TSF water management - Unusual Event inspections - Implementation of EPP - Coordinate supernatant pond surveys and soundings - Responsible for task training of all tailings personnel
Tailings Engineer	- Plan, coordinate, advise, and review all operational activities related to environmental compliance functions (quarterly inspections, leak detection, water quality, TSF water balance). Ensure Stillwater remains in compliance with all applicable permits, rules and regulations related to these areas. - Review and update TOMS Manual and EPP - Coordinate supernatant pond surveys and soundings - Quarterly TSF Inspections - Monthly TSF and instrumentation inspections - Implementation of EPP - Instrumentation monitoring and review

Position	Responsibilities
Environmental Affairs Manager	- Plan, coordinate, advise, and review all operational activities related to environmental compliance functions (quarterly inspections, leak detection, water quality, TSF water balance). Ensure Stillwater Mining Company (SMC) remains in compliance with all applicable permits, rules and regulations related to these areas. - Implementation of EPP - Communications with Government Agencies and Stakeholders
Concentrator General Foreman	- Monthly TSF inspections - Weekly TSF inspections Note – as of 2024 Q4 all duties of the Concentrator Surface Supervisor are assumed by the General Foreman. Weekly and Monthly inspections are delegated to the Surface Crew.
Concentrator Operations Supervisor	- The Surface Crew is being supervised by the Concentrator - Routine inspections of the Tailings Delivery System and Water Reclaim System during dayshift and night shift - Annual Tailings Delivery System Inspection and Planned Maintenance
Surface Crew	- Efficiently operate the TSF within SMC standards, occasional supervision to ensure regulatory compliance - Responsible for visual day shift inspections, report any unusual observations to Surface Supervisor Maintaining tailings operations within the SMC standards and at the highest level of safety.
Environmental Specialist(s)	- Operation of LAD System - Quarterly TSF inspections - Unusual Event inspections - Maintaining environmental systems, wildlife protection and annual permit reporting - Implementation of EPP - Maintain TSF water balance tracking spreadsheet - Geotechnical instrument monitoring and review (survey monuments, inclinometers, piezometers) - Geotechnical instrument support, maintenance, and installation - Monitoring and sampling of groundwater monitoring wells - Organizing and reporting on all reclamation activities - Maintaining environmental systems, wildlife protection and annual permit reporting - Implementation of EPP - Monitoring and sampling of groundwater monitoring wells - Coordinating and reporting on all reclamation activities - Annual maintenance activities: Grading of embankment crest, installation and removal of tailings discharge pipelines, wildlife fence repairs, seasonal installation and removal of evaporators
Chief Engineer	Technical support
Projects Engineer	- Coordinate TSF embankment raises - Coordinate supernatant pond surveys and sounding
Safety Manager	Coordinate the Emergency Response Team; Emergency Action Plan; Emergency Response Planning; Emergency Response Binder; Training and ensure job hazard analyses are completed as required

1.2.2 ENGINEER OF RECORD (EOR) AND THIRD-PARTY CONSULTANTS

A number of third-party consultants are involved in the design, construction and inspection of the Hertzler TSF. The roles and responsibilities of the various third-party consultants and the Engineer of Record (EOR) are summarized in Table 1.2.

Table 1.2 Stillwater Personnel - Roles and Responsibilities

Role and Name	Responsibilities	SMC Contact
Knight Piésold Ltd. EOR - Ken Brouwer, P.E. Deputy EOR - Craig Hall, P.Eng.	- Provide operational support to Stillwater - Preparation of construction specifications and drawings and contract documentation, prescribe and oversee QA/QC activities, provide on-site personnel for construction monitoring activities and practices - Review of instrumentation records, complete annual inspections and reporting	- Environmental Sustainability Manager - Environmental Specialist(s) - Corporate Environmental Manager - Tailings Management System Engineer - Environmental Specialist
Independent Review Engineer(s)	Periodic independent reviews of the TSF including operation of the facility, engineering, and geotechnical reviews	- Environmental Sustainability Manager - Corporate Environmental Manager
Independent Review Panel members	- Provide independent reviews of the future Stage 4 and Stage 5 Hertzler TSF design and once constructed review to confirm TSF operations satisfy the design intent. - Reporting to the MDEQ.	- Environmental Sustainability Manager - Corporate Environmental Manager
Hydrogeology Consultant	Provide hydrogeological support to Stillwater	- Environmental Sustainability Manager - Corporate Environmental Manager
Specialist Lining Contractor	- Qualified manufacturers and installers are used to supply and install the geosynthetics lining materials required for the TSF construction - Complete detailed inspections and make repairs to the HDPE geomembrane on a semi-annual basis	- Environmental Specialist - Concentrator Manager
Earthworks Contractor	- Local contractor with heavy equipment - Qualified to construct engineered embankments, random fills, surface preparation and assistance for liner installation, reclamation earthworks, and other earthmoving activities	- Environmental Specialist - Concentrator Manager
Reclamation Contractor	Reclamation work	Environmental Specialist

1.2.3 REGULATORY AGENCIES

The jurisdiction for regulation of tailings impoundments resides with the Montana Department of Environmental Quality (MDEQ). Embankments for TSFs and water reservoirs subject to permits issued by MDEQ are specifically exempt from certain provisions of the *Montana Dam Safety Act* (MCA 85-15-107) and therefore are not subject to embankment hazard potential classification within the State (MCA 85-15-209). The MDEQ is the regulatory agency responsible for ensuring the applicable legislative requirements outlined in MCA 82-4-379, relating to this TOMS Manual, are met by Stillwater.

The Mine Safety and Health Administration (MSHA) is responsible for administering the provisions of the *Federal Mine Safety and Health Act* of 1977 (*Mine Act*) and enforcing compliance with mandatory safety and health

standards. Title 30 Code of Federal Regulations (CFR) part 56.20010 requires that 'if failure of a water or silt retaining dam at a mine will create a hazard, it shall be of substantial construction and inspected at regular intervals'. The *Mine Act* requires MSHA inspection of underground mines at least four times per year.

1.3 TRAINING

Training is required for any personnel involved in the operation, maintenance, surveillance and inspection of the TSF. Training must be conducted by the Concentrator Manager, Concentrator General Foreman or a suitably qualified individual familiar with the design, operation, maintenance and inspection of all civil and mechanical works associated with the facility. Training sessions will be documented, and a record kept on file on Stillwater's electronic filing system.

The GM of SWM Operations, Environmental Sustainability Manager, Concentrator Manager, Tailings Engineer, and Surface Supervisor must fully understand and be able to implement the TOMS Manual requirements and also ensure that all applicable mine personnel and contractors understand the requirements presented in the TOMS Manual.

Appropriate site personnel are responsible for being continually observant of the visual indications of the TSF performance. Anything observed that is outside of normal operating parameters, as outlined in this TOMS Manual, must be reported to the Concentrator Manager and/or Environmental Sustainability Manager immediately.

1.4 CONTROL AND REVISIONS TO THE MANUAL

This TOMS Manual is a controlled document, and specific procedures have been defined for the distribution, revision, and review as outlined below.

1.4.1 DISTRIBUTION

The TOMS Manual will be controlled by the Environmental Sustainability Manager. The Environmental Sustainability Manager will be responsible for maintaining the latest version of the TOMS Manual on Stillwater's electronic file management system. The current location is on US SharePoint is US Environmental Team/ Corporate/5.0 Tailings Management System/Group Tailings Management System (GTMS) & Policy/ TOMS Manuals

The latest version of the TOMS Manual is also available on Knight Piésold's Ltd. (KP) FULCRUM data management site. The TOMS Manual location on FULCRUM is shown in Figure 1.2

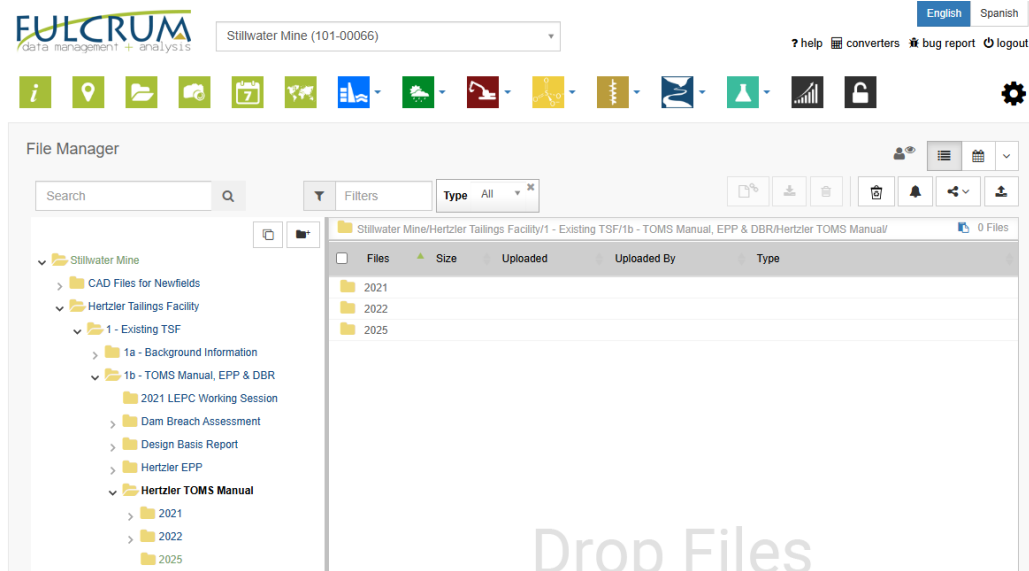


Figure 1.2 TOMS Manual Location on FULCRUM

1.4.2 REVISIONS

The TOMS Manual is required to be reviewed on an annual basis to ensure that it reflects the current operating conditions. The TOMS Manual will be reviewed in conjunction with the annual inspections and third-party reviews outlined in Section 4.

The EOR shall certify any revisions made to the TOMS Manual. The Environmental Sustainability Manager notify Stillwater's responsible personnel when revisions to the TOMS Manual are made.

1.5 REFERENCE DOCUMENTS

Pertinent references for the Hertzler TSF and associated infrastructure are included in Appendix B. Electronic copies are available from Stillwater's electronic file management system.

1.6 REGULATORY REQUIREMENTS

The regulatory requirements and commitments that pertain to the construction, operation, and closure of the Hertzler TSF are summarized in the Stillwater Mine Consolidated Operations and Reclamation Plan (CORP). The CORP includes all Environmental Impact Statements, associated Records of Decision (RODs), stipulations for the SWM and its facilities, and a list of applicable statutes and regulations.

1.7 INDEPENDENT TAILINGS REVIEW BOARD

Stillwater's Corporate Tailings Management Framework requires the appointment of an Independent Tailings Review Board (ITRB) to fulfill an oversight role of the operation of the Hertzler TSF. An Independent Review Panel (IRP) has been assembled to review the design of the future Stage 4 and Stage 5 Hertzler TSF as 82-4-377 MCA (MT, 2024).

The ITRB's overall responsibility includes completing a review of the full TSF life cycle from design through closure planning. The ITRB reports directly to the Accountable Executive. ITRB responsibilities include the following as per the Sibanye Global Tailings Management System:

- Review Corporate Tailings Mgmt. documents (Global Tailings Management System, Terms of Ref, etc.) against local legislation, the GISTM, ICMM Guidelines, and international best practice
- Review Tailings Roles (RTFE, EOR, etc.) regarding responsibilities and competency
- Site Review
- Documents - Tailings Operations, Surveillance, and Maintenance manual (i.e. TOMS)
- Compliance - with the Corporate and Site specific documentation
- Review TSF Design and Engineering Documents – Design Reports, Design Criteria, Investigation Reports, etc.
- Understand the current TSF performance
- Reporting on any deviances and risks posed by the TSF to the Accountable Executive

1.8 INDEPENDENT REVIEW PANEL

The IRP was assembled to review the design of the future Stage 4 and Stage 5 Hertzler TSFs as per 82-4-377-2:7 MCA (MT, 2024). The IRP members are also the ITRB members.

The IRP reports to Montana (MT) DEQ and not SMC. The IRP's overall responsibilities are outlined in 82-4-377 MCA (MT, 2024) which included the completion of design review and new and expanded TSFs and periodic reviews at least once every 5 years. constructed,

2.0 DESCRIPTION OF THE TAILINGS STORAGE FACILITY

2.1 GENERAL

The following sections provide a brief summary of the design and management of the Hertzler TSF and associated facilities. Additional information is available in the cited references listed in Appendix B.

2.2 PROJECT DESCRIPTION

2.2.1 SITE LOCATION

The SWM is located in south central Montana, approximately 5 miles south of Nye, Montana. The Hertzler TSF is located approximately 7 miles northeast of the mine site adjacent to Stillwater County Road 420. The locations of the SWM and Hertzler TSF are shown on Figure 2.1. The overall site plan for the Hertzler TSF is shown on Figure 2.2.

2.2.2 PROJECT HISTORY

Stillwater has operated the SWM, an underground platinum and palladium mine, within Stillwater County since 1986. Ore is sent to an on-site concentrator with a designed production rate of approximately 3,000 tons per day (tpd). The concentrate is shipped to SMC's Smelter and Base Metals Refinery located in Columbus, Montana for further processing. The mine has been developed and expanded since initial construction was completed in 1986. The SWM workings extend laterally approximately six miles east to west and vertically more than one mile.

The Nye TSF was part of the original 1984 operating plan. The Hertzler TSF was proposed in SMC's 1996 Mine Waste Management Plan. The management of water during closure along with additional reclamation details for both tailings facilities were proposed under a revised plan. The plans were subsequently approved by the Montana Department of Environmental Quality and U.S. Forest Service (DEQ and USFS, 2012).

Construction of the Hertzler TSF began in 1999 at the Hertzler Ranch, as the Nye TSF was reaching full capacity. The TSF has been built and expanded in stages. The design and construction are documented in numerous reports, which are listed in Appendix B and briefly summarized here:

- The Stage 1 Hertzler TSF and Land Application and Disposal (LAD) Storage Pond were completed in 2000 and commissioned in 2001
- Construction of the Stage 2 Hertzler TSF began in 2003 and was completed and commissioned in 2004
- Construction of the Stage 3 Hertzler TSF began in 2014 and was completed and commissioned in 2015

2.2.3 PROCESS DESCRIPTION

Ore is delivered from the underground workings to the concentrator where it is crushed and upgraded to a concentrate that is shipped offsite to SMC's smelter and base metal refinery in Columbus, Montana for further upgrading. Milling involves a combination of crushing, grinding, flotation and filtration processes to produce the concentrate. The tailings predominantly consist of sand and silt sized rock fragments left over from the milling process. The tailings are pumped as slurry from the Concentrator to the underground Sand Plant or the Paste Plant located adjacent to the Nye TSF. The tailings pumped to the Sand Plant are separated into coarse sand and slimes fractions. The coarse sand fraction is dewatered and utilized as backfill in the underground mine. The remaining tailings (predominantly slimes fraction) are pumped to the Hertzler TSF as slurry. The process flow sheet is illustrated on Figure 2.3.

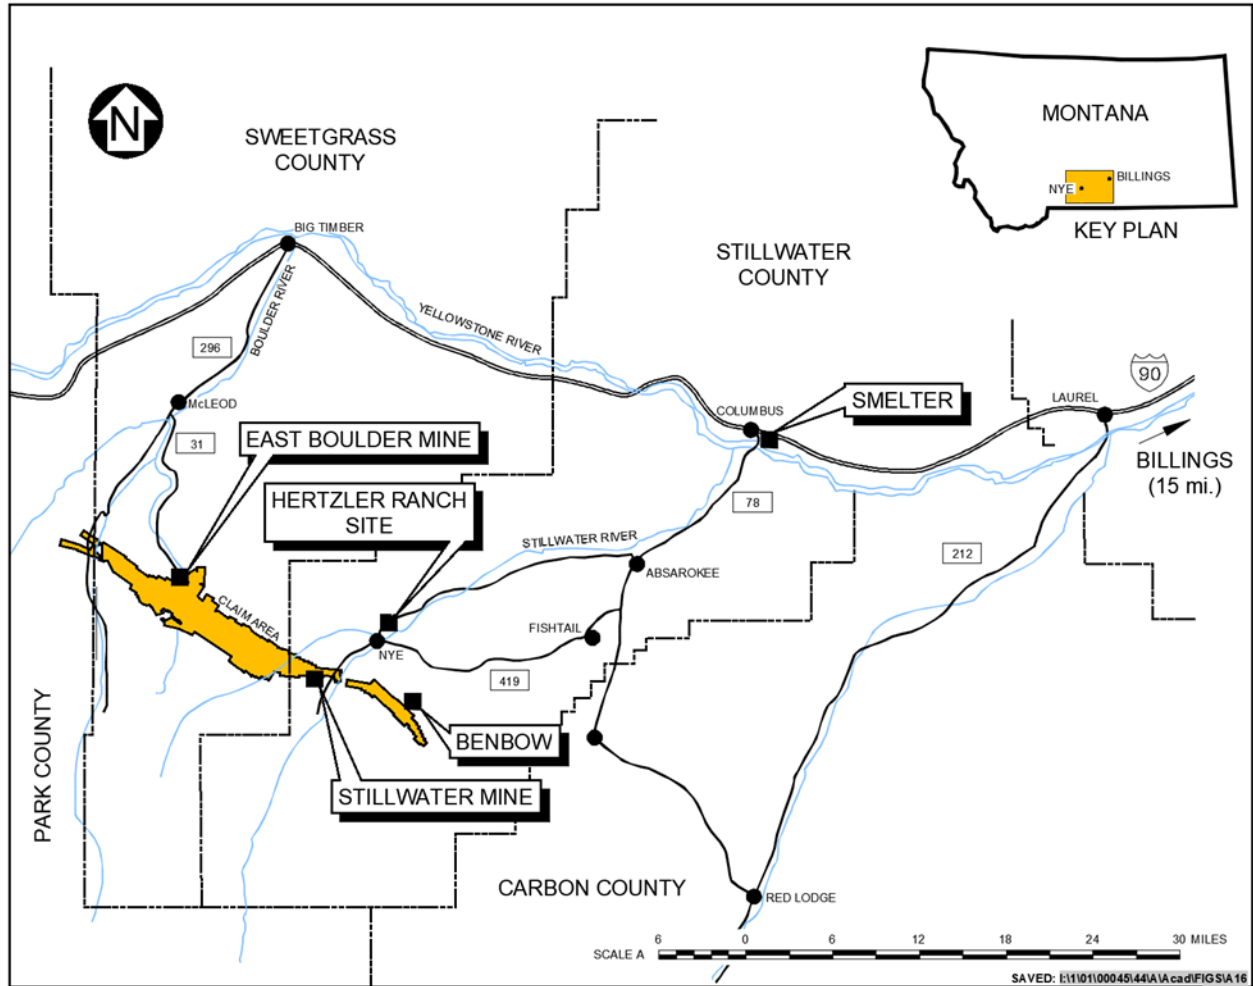
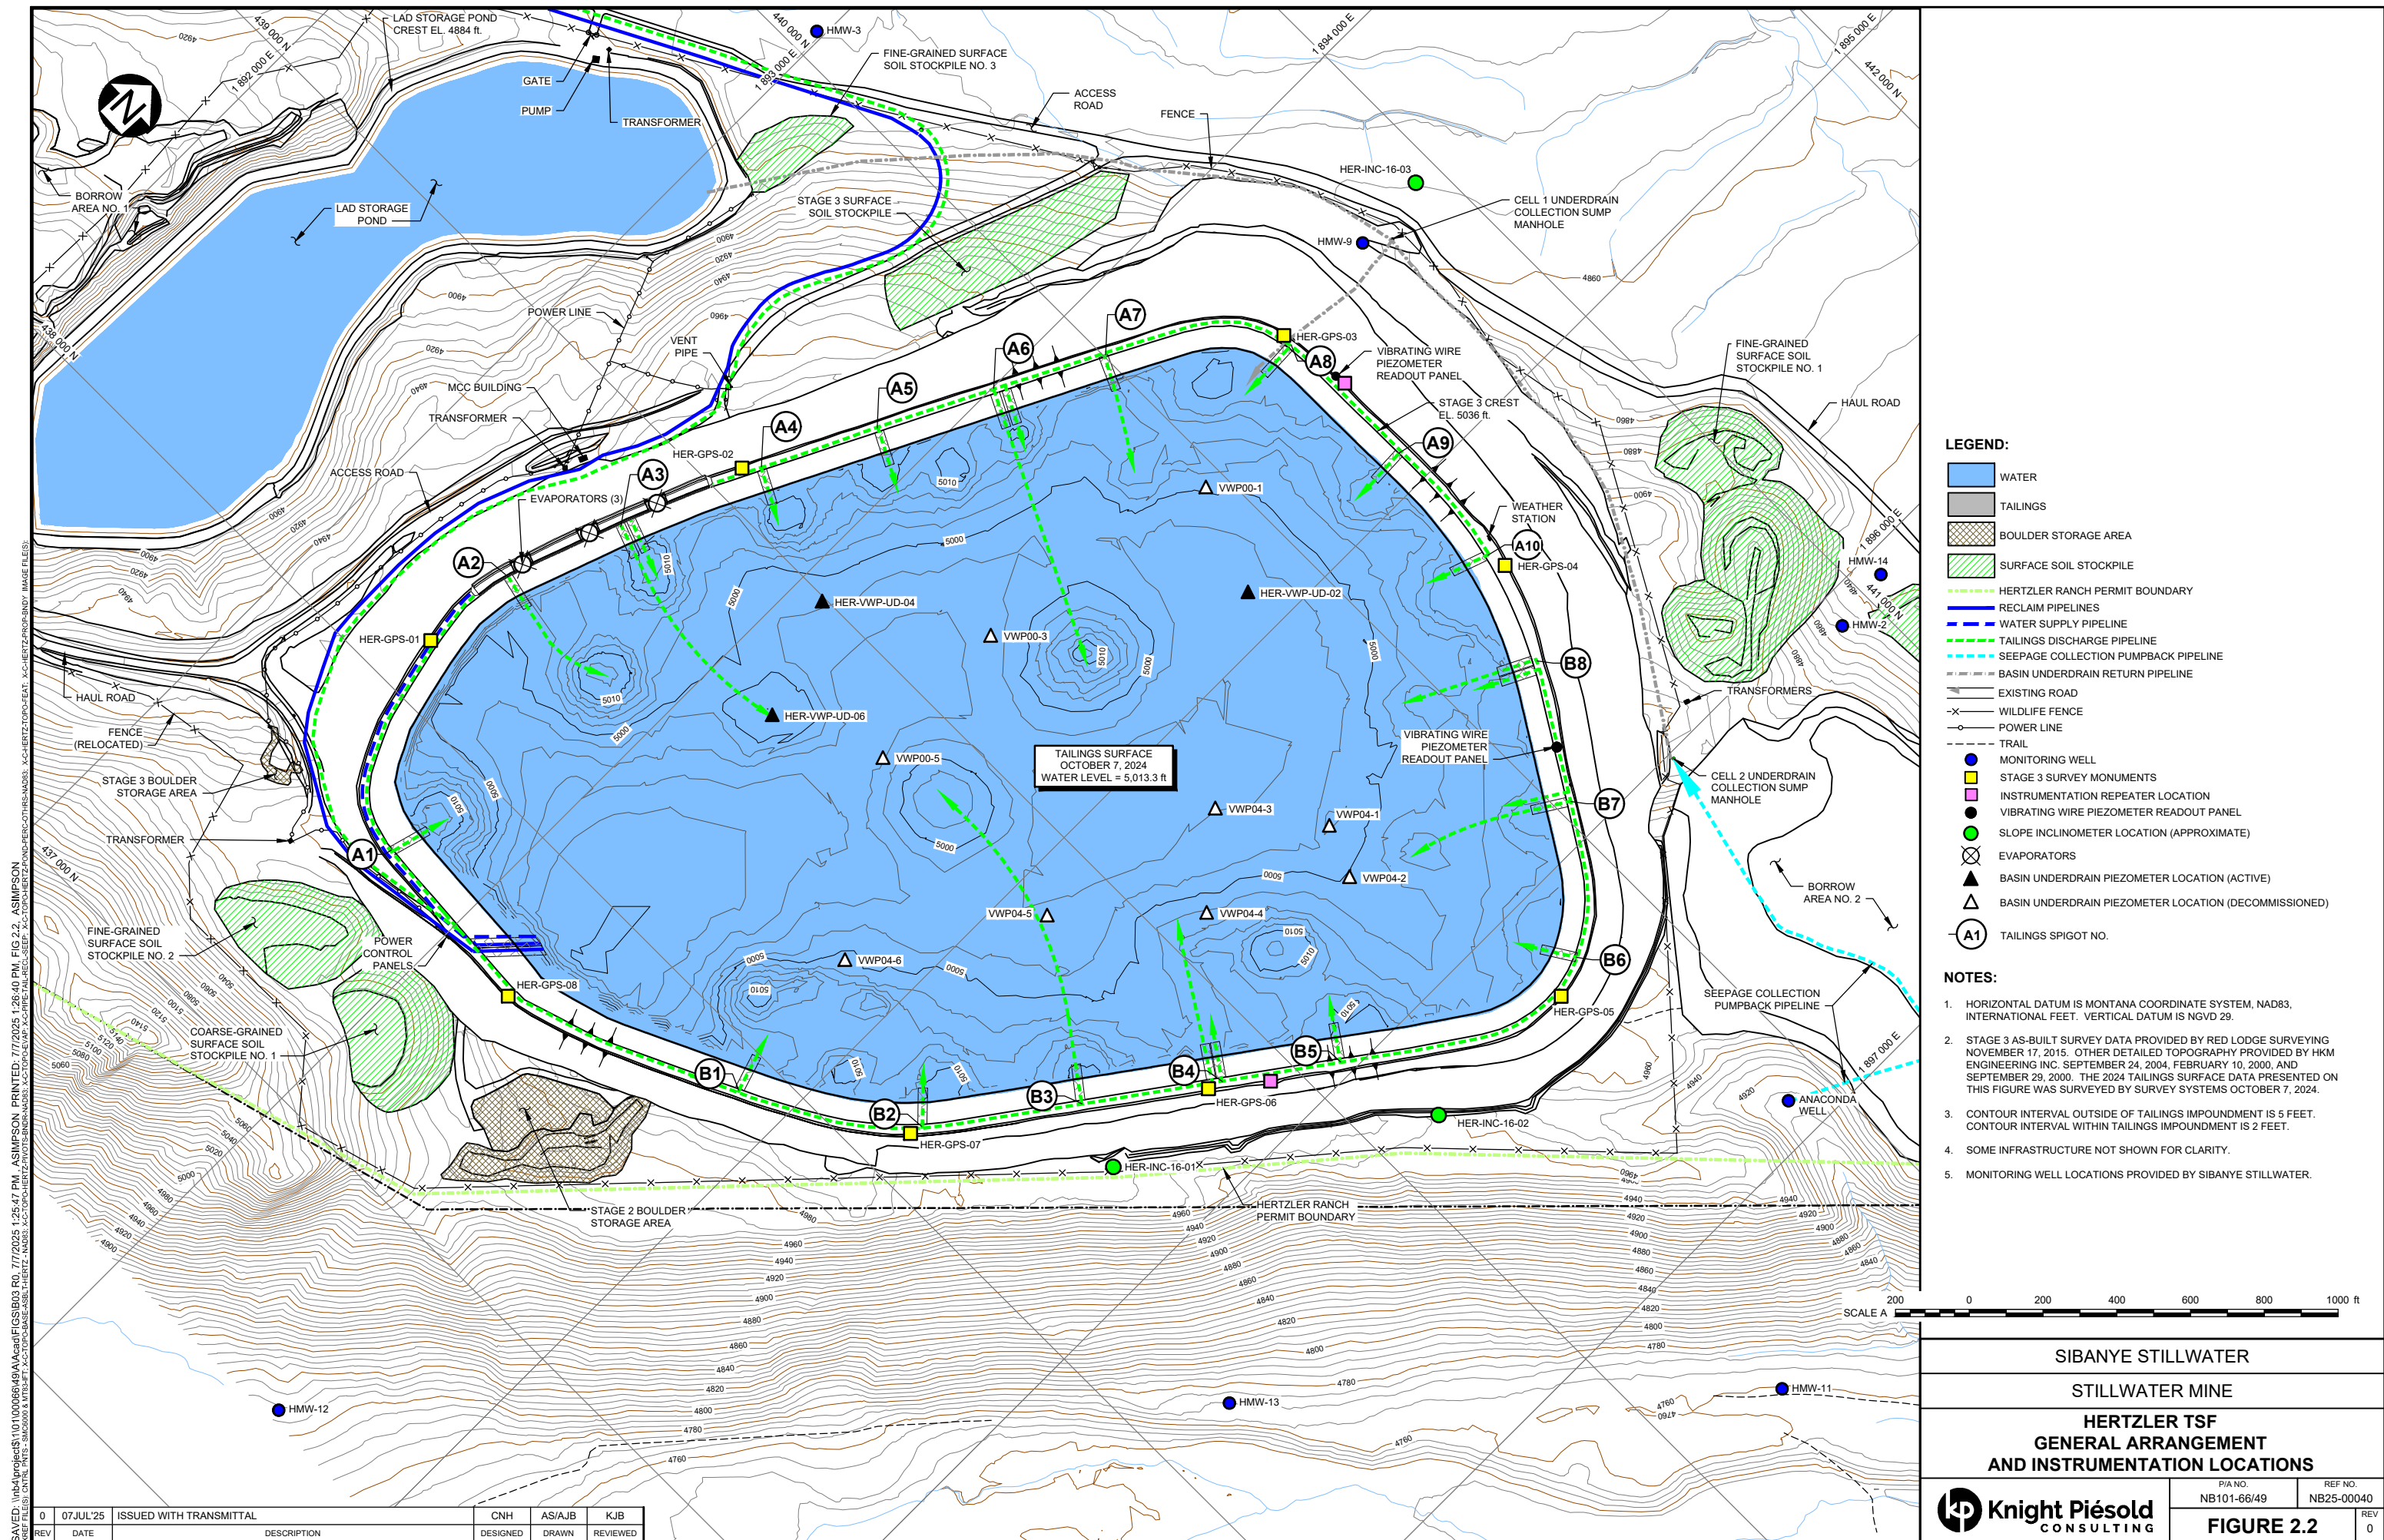


Figure 2.1 Site Location



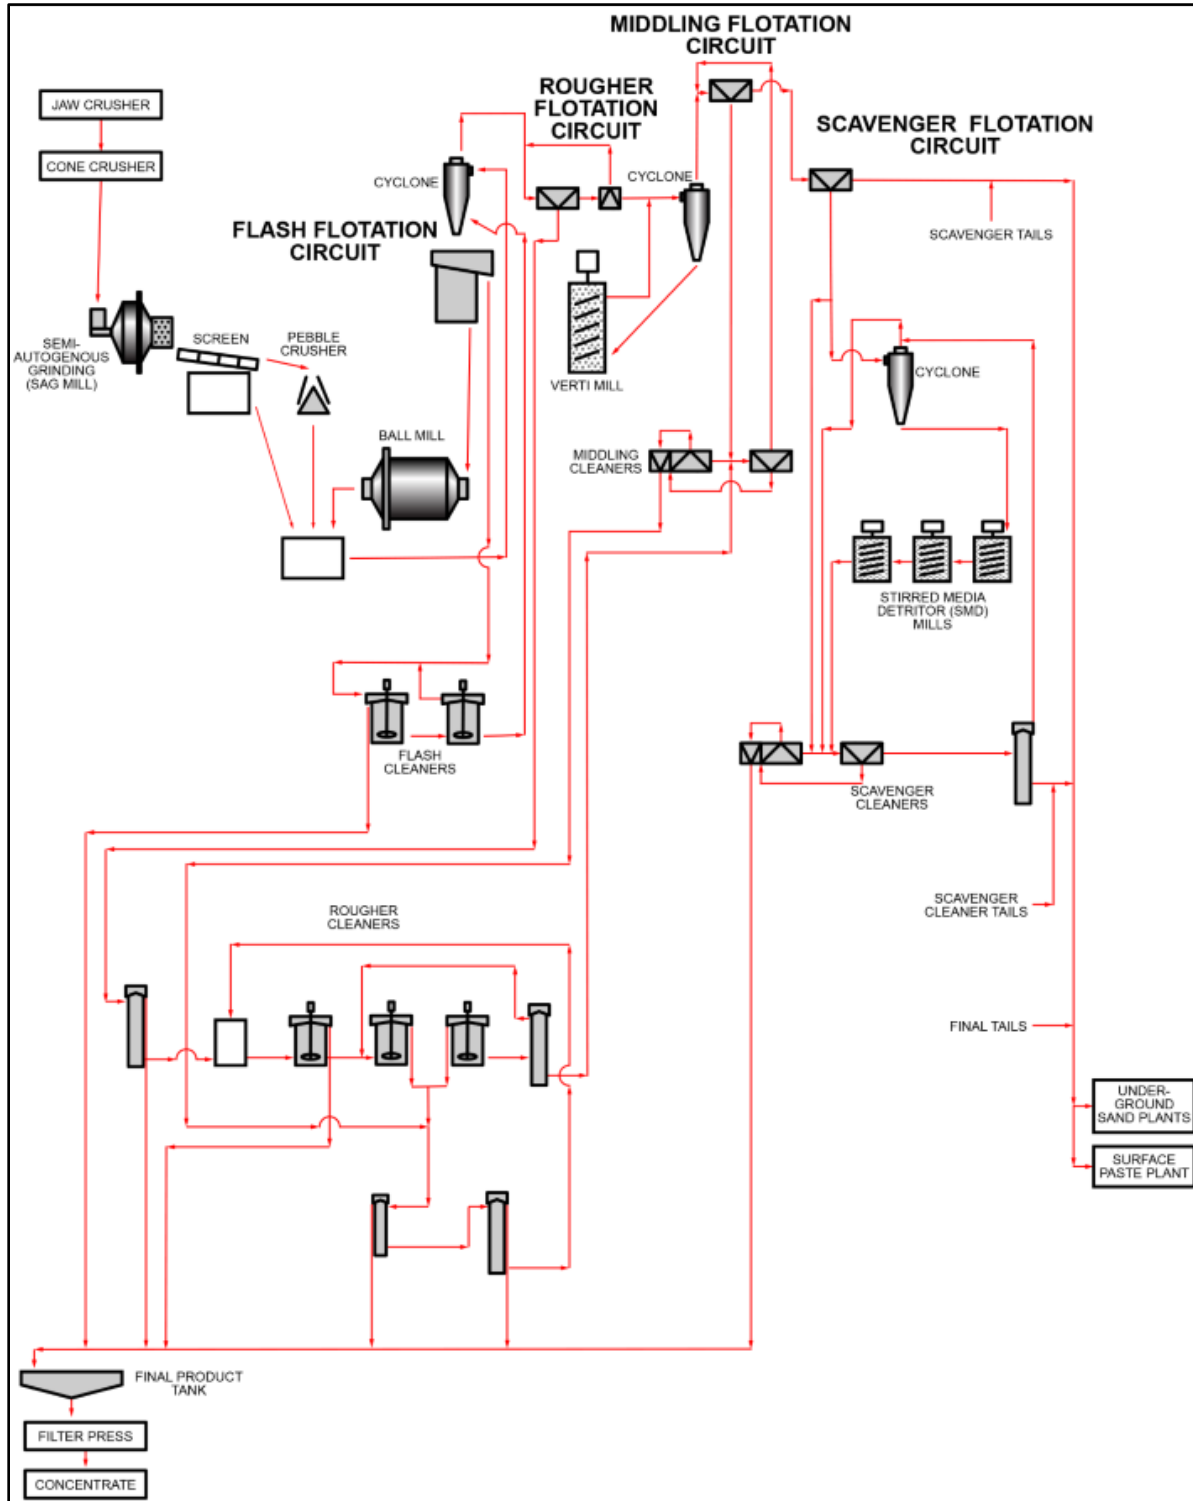


Figure 2.3 Process Flow Sheet

2.2.4 TAILINGS MANAGEMENT

Historically, flotation tailings were pumped from the concentrator to the underground Sand Plant where they were separated by cyclones into a coarse fraction (sand) and a fine fraction (slimes). The sand material was used underground as backfill and the slimes were pumped to the Nye TSF for disposal. At times, the entire bulk tailings stream reported to the Nye TSF. In early 1999 SMC commissioned a paste tailings mine backfill system. The Paste Plant dewateres the whole tailings product and cement is added to generate high strength backfill. The current operations primarily utilize the underground Sand Plant for backfilling and the tailings slimes are pumped to the Hertzler TSF.

The Hertzler TSF was designed to store the fine tailings (slimes) that are not suitable for use as sand backfill as well as the whole tailings. Since commissioning of the Stage 1 Hertzler TSF in 2001, approximately 50% of the total tailings (predominantly tailings slimes) have been pumped from the mine site to the Hertzler TSF for storage. Supernatant pond water is recycled to the Concentrator for re-use in the milling process via the Reclaim Water System.

Tailings are discharged into the Hertzler TSF from a series of spigots located around the perimeter of the facility. The tailings discharge is rotated round the impoundment in order to develop a low permeable tailings deposit against the upstream slope of the lined embankment and maintain the operating pond away from the embankment.

Stillwater currently utilizes both the Hertzler and Nye TSFs to maintain operational flexibility for process water management. The Interim Cap is currently being constructed on the Nye TSF and includes for water management during upset operating conditions.

2.3 DESIGN BASIS AND OPERATING CRITERIA

2.3.1 OVERVIEW

The principal objectives for the design and staged construction of the Hertzler TSF are to safely and securely manage tailings materials and to ensure protection of the regional groundwater and surface water quality (both during operations and in the long term) and to achieve effective reclamation at mine closure. The principal design features are as follows:

- Permanent, secure and total confinement of all solid waste materials within an engineered storage impoundment
- Control, collection and removal of free-draining liquids from the tailings during operations and to the maximum practical extent, the prevention of uncontrolled leakage from the TSF
- The inclusion of monitoring features for all aspects of the impoundment to ensure performance goals are achieved
- Staged development of the TSF to distribute capital expenditure over the life of the mine

The design basis and operating parameters for the Hertzler TSF and associated facilities are provided in detail within the various design and construction reports listed in Appendix B. The main components of the Hertzler TSF are the tailings embankment, tailings basin which includes a geosynthetic lining system and Basin Underdrain, tailings delivery system, water reclaim system and Land Application and Disposal (LAD System). The LAD Storage Pond provides temporary store of treated mine water from SWM's biological treatment system prior to disposal via percolation and irrigation pivots at the Hertzler Ranch. The key design and operating parameters are summarized in the Design Basis Report (KP, 2022). The key design and operating parameters are summarized in Table 2.1. The TSF components are briefly described below.



TABLE 2.1

STILLWATER MINING COMPANY
STILLWATER MINE

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
KEY DESIGN AND OPERATING PARAMETERS

Print Jul-07-25 12:39:10

Item No.	Component	Design Criteria/Operating Criteria
1.0 General Design Criteria		
1.1	Codes and Standards	ASTM, AASHTO, ACI, ANSI, MSHA, OSHA, MMMR, ARM, FEMA, ICOLD, NBC and related codes
1.2	Site Elevation	Approximately 5000 ft.
1.3	Meteorological Parameters	- Average Annual Precipitation = 25 inches (approx. 15-20% as snow) - Annual Evaporation = 23 inches (est.) - Mean Annual Temp = 46 degrees F - Design Storm Event is the 72-Hour PMF = 38 inches
1.4	Hydrologic Evaluation and Hazard Rating (U.S. Army Corps of Engineers)	- Size Classification: Large (Dam Height >100 feet) - Hazard Potential: Low to High Hazard - Design Storm: 72-Hour Probable Maximum Flood (PMF)
1.5	Seismic Design	- Maximum Design Earthquake (MDE): (The MDE corresponds to the Maximum Credible Earthquake (MCE)) - Earthquake Magnitude = 7.0 - Maximum Bedrock Acceleration = 0.15g - Seismic Coefficient = 0.10g (Seismic Zone 2)
2.0 Tailings Production		
2.1	Tailings Production Information	- Approximately 50% of the total tailings production will report to the Hertzler Tailings Impoundment - Design Mill throughput = 3,000 tpd - Projected Average Mill throughput = 2,450 tpd
2.2	Solids Content of Tailings Slurry	35% (approximate)
2.3	Tailings Average Dry Density	70 pcf
2.4	Tailings Solids Specific Gravity	2.67
2.5	Water Reclaim	- Design capacity = 1,500 gpm - Reclaim pipe from tailings impoundment: 12" DR7.3 HDPE
3.0 Tailings Basin		
3.1	Storage Capacity	- Stage 1 - 2.6 million cubic yards - Stage 2 - 9.0 million cubic yards - Stage 3 - 16 million cubic yards
3.2	Operating Pond Volume	- Minimum Operating Pond Volume = 50 million gallons (153.6 acre-ft.), equivalent to 1.7 ft. of water, El. 5028.7 to 5030 ft. - Maximum Recommended Operating Pond Volume = 150 million gallons (460.6 acre-ft.), equivalent to 5.2 ft. of water, El. 5024.8 to 5030 ft.
3.3	Design Freeboard	- During operations the total freeboard is 6 ft. including the following: - Storage capacity for the 72-hour PMF, storage volume approximately 378 acre-ft. - Approximately 3 ft. for wave run up protection - After closure the tailings surface will be graded to control runoff. Stormwater drainage provisions at final reclamation to provide routing for the PMF. No freeboard or spillway required.
3.4	Lining System	- Stage 1 (Cell 1) - Low permeability soil liner overlain by 60 mil HDPE - Stage 2 - Low permeability geosynthetic clay liner (GCL) overlain by 60 mil HDPE - Stage 3 - Low permeability GCL overlain by 100 mil HDPE - Textured wearsheets included on ramp and at tailings discharge locations
3.5	Basin Underdrain System	- Basin Underdrain layer (granular filter, free draining layer (gravelly sand), perforated CPT collection pipes and HDPE conveyance pipes) installed over the 60 mil HDPE geomembrane within Cells 1 and 2. Coarse granular material was placed over the drain sections as a protective layer. - The underdrain collection pipeworks connect into valved solid steel outlet pipes (concrete encased). - Both the underdrain collection systems and the conveyance pipe outlet structures drain by gravity to collection sumps downstream of Cells 1 and 2.



TABLE 2.1

STILLWATER MINING COMPANY
STILLWATER MINE

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
KEY DESIGN AND OPERATING PARAMETERS

Print Jul-07-25 12:39:10

Item No.	Component	Design Criteria/Operating Criteria
4.0 Tailings Embankment		
4.1	Embankment Crest Width	30 feet (minimum)
4.2	Embankment Height (Max.)	- Stage 1 - 98 ft. (Crest El. 4,956 ft.) - Stage 2 - 134 ft. (Crest El. 4,992 ft.) - Stage 3 - 178 ft. (Crest El. 5,036 ft.)
4.3	Embankment Crest Length	- Stage 1 - 2,800 ft. approx. - Stage 2 - 7,850 ft. approx. - Stage 3 - 8,600 ft. approx.
4.4	Embankment Slopes	- Downstream fill slope: 2H:1V - Upstream fill slope: Stage 1 = 3H:1V Stage 2 and 3 = 2.5H:1V
4.5	Embankment Fill Material	- Glacial materials excavated from within Cells 1 and 2 of tailings basin for Stage 1 and 2 - Glacial material and bedrock for Stage 3 excavated from external borrow areas for Stage 3
4.6	Stability Requirements	- The Minimum Acceptable Factors of Safety (based on the U.S. Army Corps of Engineers) for each case considered are as follows: - End of embankment construction 1.3 - Long term (full tailings pond) 1.5 - Seismic loading (pseudo-static) 1.1
5.0 LAD Storage Pond		
5.1	Function	Storage of mine water for application by LAD pivots during the summer months
5.2	Hazard Rating	Low hazard potential
5.3	Capacity	Additional storage capacity for approximately 67 million gallons of water (204 acre-feet). Total storage capacity = 192 million gallons of water (588 acre-feet).
5.4	Design Freeboard	4 ft. to provide storage for the PMF and provide wave run-up protection
5.5	Dam Height	Dam height (from crest to downstream toe) - 18 ft.
5.6	Crest Width	30 ft.
5.7	Embankment Slopes	- Upstream slope 3H:1V - Downstream slope 3H:1V
5.8	Lining System	100 mil HDPE Geomembrane

I:\1\01\00066\49\A\Report\Hertzler TOMS Update - V1.7\Table 2.1 - Hertzler Key Design and Operating Parameters.xlsx Design Criteria

2.3.2 TAILINGS EMBANKMENT

The tailings embankment has been constructed with a finer upstream zone (Zone A) and a coarser downstream zone (Zone B). The embankments were constructed with Random Fill excavated from within the impoundment and adjacent borrow areas. The staged impoundment construction is summarized below.

- The Stage 1 impoundment was constructed in 1999 and 2000 and consisted of a single cell, with North and South confining embankments constructed to a minimum elevation of 4,956 ft.
- The Stage 2 Impoundment was completed in 2004 and involved an expansion to the east, with excavation of a second tailings storage cell adjacent to the existing Stage 1 cell (Cell 1). A divider berm separated the two cells, which allowed for independent operation until the tailings surfaces reached the minimum divider berm elevation of 4,956 ft. at the north end. The Stage 2 expansion also involved construction of embankments around the entire facility, to a minimum crest elevation of 4,992 ft.
- The Stage 3 impoundment was complete in 2015 and included raising the embankment around Cells 1 and 2 to El. 5,036 ft. The embankment was raised using the downstream construction method. The Stage 3 embankment was constructed with Random Fill excavated from external borrow areas adjacent to the tailings impoundment. The embankment construction included a finer upstream zone (Zone A) and a coarser downstream zone (Zone B). The Stage 3 construction was completed in 2015. The maximum operating level for the Stage 3 impoundment is El. 5,030 ft.

2.3.3 TAILINGS BASIN

The Stage 3 Hertzler TSF is projected to provide storage to between 2031 and 2033 based on current mining plans and pond volumes. The total capacity of the tailings impoundment is approximately 16 million cubic yards (15.1 Mt). The tailings basin filling is dependent on actual concentrator throughput rates, tailings deposition characteristics, water inputs and outputs and in situ settled tailings density. The estimated filling schedule of the tailings impoundment is illustrated on Figure A.1 (Appendix A).

The minimum freeboard requirement for the Tailings Basin is 6 ft., which includes storage of the Probable Maximum Flood (PMF) and a dry freeboard allowance of 3 ft. for wave run-up. The maximum operating level of the Stage 3 Hertzler TSF is 5,030 ft. The recommended operating pond volumes for the tailings basin are as follows:

- The minimum operating pond volume is approximately 50 million gallons (153.6 acre-ft.). SMC has indicated that this is the minimum water required to maintain sufficient water volume for operations. This is equivalent to an average of approximately 1.7 ft. of water over the basin area (El. 5,028.3 to 5,030 ft.).
- The maximum recommended operating pond volume is approximately 150 million gallons (460.6 acre-ft.). This is equivalent to an average of approximately 5.2 ft. of water over the basin area (at fill El. 5,025 to 5,030 ft.). The current maximum operating pond volume is based on maintaining a sufficient water cover over the tailings surface to prevent dusting during the winter months. It is noted that the Hertzler TSF may be safely operated with an operating pond volume that is greater than 150 million gallons as long as the 6 ft. minimum freeboard requirement is maintained.

The tailings basin is lined with a composite lining system and a Basin Underdrain is installed over the floor of Cells 1 and 2 to promote tailings consolidation and reduce the pressure head on the lining system, thereby minimizing the potential for seepage from the impoundment. The composite lining system was constructed using low permeability soil, geosynthetic clay liner (GCL) and HDPE geomembrane. The composite lining system for each impoundment stage is described below.

- The Stage 1 lining system included a low permeability soil liner overlain by 60 mil HDPE geomembrane to form the primary seepage barrier. The soil liner provided suitable bedding for the overlying geomembrane and acts as a secondary liner in the event of potential defects in the geomembrane.
- The Stage 2 lining system included installation of a 60 mil HDPE geomembrane as the primary seepage barrier. The underlying secondary liner consisted of a low-permeability soil liner within the Cell 2 basin floor area, and a GCL installed on all of the Stage 2 upstream slopes.
- The Stage 3 lining system included installation of a 100 mil HDPE geomembrane as the primary seepage barrier and an underlying GCL as the secondary seepage barrier.

The Basin Underdrain layers include a granular drainage layer (gravelly sand), perforated CPT collection pipes and HDPE conveyance pipes installed over the 60 mil HDPE geomembrane on the floor of Cells 1 and 2. Coarse granular material was placed over the collection and conveyance pipe alignments as an erosion protective layer. The underdrain collection pipework is connected to concrete encased steel outlet pipes, which drain to the Basin Underdrain Collection Sumps.

The Stage 1 Basin Underdrain in Cell 1 flows by gravity to the Stage 1 Collection Sump located north of Cell 1. The Stage 2 Basin Underdrain in Cell 2 flows by gravity to the Stage 2 Collection Sump located north of Cell 2. Depending on water quality water can be managed as follows:

- Collected water can be pumped back to the TSF pond via a buried 3-inch HDPE pipe from the Cell 1 pumphouse located adjacent to the northwest corner of the TSF, or
- Collect water can be pumped via a 3-inch HDPE pipeline that extends from the Cell 1 Underdrain sump to the LAD Storage Pond. This pipeline allows water to be transferred from the Underdrain to the LAD Storage Pond.

Currently water is transferred to the LAD Storage Pond at a rate of approx. 3.1 M gals per month.

2.3.4 SEEPAGE COLLECTION SYSTEM

An external seepage collection system is located within Borrow Area No. 2 adjacent to the northeast corner of the Hertzler TSF. In 2024 water from the Anaconda pump back well was redirected into the Borrow Area No. 2 seepage collection system. Collected seepage is then pumped back to the supernatant pond within the TSF (approx. 5 gpm in 2024). The composite lining system and Basin Underdrain layers in Cells 1 and 2 are the primary method for reducing seepage losses from the tailings impoundment. There are monitoring wells located downstream of the TSF which could be utilized to recover collected seepage back to the Hertzler TSF, if required. Additional collection wells could also be installed downgradient of the TSF if needed.

2.3.5 TAILINGS DELIVERY SYSTEM

Tailings are pumped from the mine site to the Hertzler TSF via two buried 8 inch steel pipes lined with an HDPE inner sleeve. The pipeline right of way is located along Stillwater County Roads 419 and 420 as illustrated on Figure 2.1. The pipeline right of way follows the site Access Road to Vault 19. The tailings delivery pipelines extend from Vault 19 along the access road to the crest of the impoundment.

The tailings delivery pipelines are connected to tailings discharge pipelines which are installed on the upstream side of the impoundment embankment. The tailings discharge pipeline consists of a butt fusion welded 8-inch diameter DR 17 HDPE pipe. The tailings slurry is discharged into the Hertzler TSF from sixteen spigot locations that extend from the embankment crest down toward the tailings and supernatant pond surface and eight (8) floating discharge lines that extend towards the center of the TSF basin.

Tailings slurry flow is monitored at both ends of the pipeline system. Visual monitoring of the tailings slurry flow is also carried out at the Hertzler TSF. Emergency shutoff for the tailings delivery system is located in the Concentrator. The tailings delivery pipelines include a leak detection system within five automated vaults to notify the Concentrator of any fluid releases through the HDPE inner sleeve.

2.3.6 WATER RECLAIM SYSTEM

Three inclined reclaim pumps and pipelines are located at the south end of Cell 2. The pumps are connected to 8-inch diameter DR17 HDPE pipes which are connected to the steel Reclaim Pipe Manifold located on the crest of the impoundment. The Reclaim Pipe manifold is connected to a 12 inch diameter DR 11 HDPE pipeline. The water reclaim pipeline is installed in the pipeline right of way located along Stillwater County Roads 419 and 420 as illustrated on Figure 2.1. A booster station for the water reclaim system is located just north of the mine site adjacent to County Road 419. Pressures within the water reclaim pipeline are monitored and pressure alarms output at the concentrator and Hertzler pumphouse control rooms.

2.3.7 LAND APPLICATION AND DISPOSAL (LAD) SYSTEM AND PERCOLATION PONDS

The LAD system was designed to beneficially dispose of treated mine water via agronomic application. The system is operated during the summer months and consists of the treated mine water pipeline, LAD Storage Pond, irrigation pivots and associated infrastructure (e.g., pumps and pipelines). SMC also employs percolation ponds to dispose of treated mine water as needed, primarily during months that the center pivots cannot be operated.

Treated mine water is pumped from the SWM to the LAD Storage Pond for storage prior to being applied with the irrigation pivots or percolated to groundwater. The mine water pipeline is 12-inch HDPE which is buried in the pipeline right of way located along Stillwater County Roads 419 and 420, as illustrated on Figure 2.1.

The LAD Storage Pond was expanded as part of the Stage 3 TSF construction program. The design basis and key operating parameters of the LAD Storage Pond are included in Table 2.1. The total storage capacity of the LAD Storage Pond is 192 million gallons (588 acre-feet).

The LAD Storage Pond is lined with a 100 mil HDPE geomembrane overlying a 12 oz/yd² non-woven geotextile. The depth-area-capacity curve for the LAD Storage Pond is shown on Figure A.4 (Appendix A). The location of the LAD Storage Pond at the Hertzler Ranch site is shown on Figure 2.2.

2.3.8 MECHANICAL EVAPORATION

Mechanical evaporators were installed on the crest of the West Embankment in 2022. The evaporators will be utilized on a seasonal basis to remove water from the TSF. The operating season is negotiated by SMC with residents of the nearby Spreading Wing subdivision. In 2024 the operating season ran from June 1st to Sept 30th between 8am and 5pm. The goal is to start the operating season for the evaporators earlier in the year. The supernatant water is supplied to the evaporators via a water supply pump and HDPE pipeline. The water supply pump is located on the South Embankment adjacent to the reclaim pumps.

2.4 WATER MANAGEMENT

2.4.1 GENERAL

The Hertzler TSF supernatant water consists of tailings water and basin runoff. Supernatant water is recycled back to the concentrator via the Reclaim Water System described in Section 2.3.6. Seepage control for the Hertzler TSF is provided by a geomembrane liner system and Basin Underdrain. Water collected from the Basin Underdrain is pumped back into the tailings impoundment or may be removed from the Hertzler TSF by transferring water from the Basin Underdrain to the LAD Storage Pond.

There are no upstream catchment areas reporting to the Hertzler TSF. Meteoric water reporting to the impoundment includes direct precipitation to the tailings basin and runoff from the embankment crest. Surface water management measures for the facility include ditches and sedimentation basins located along the access roads and adjacent areas.

2.4.2 WATER BALANCE

The water balance for the Hertzler TSF is maintained by SMC. The water balance is updated on a monthly basis to reflect the operating conditions. The master copy is located on SharePoint at: [https://sibanyestillwater.sharepoint.com/sites/USEnvironmentalTeam/Corporate/5.0 Tailings Management System/Projects/Tracking](https://sibanyestillwater.sharepoint.com/sites/USEnvironmentalTeam/Corporate/5.0_Tailings_Management_System/Projects/Tracking)

The following data are pertinent to the operation of the TSF and are tracked and included as part of the water balance:

- Meteorological data
- Tailings Production
 - % Solids in Tailings Slurry
 - Total Tailings Sent to the Hertzler TSF
- Reclaim water volumes recycled to the Concentrator
- Water volumes transferred to the LAD Storage Pond via the Basin Underdrains
- Water volumes transferred to the TSF Pond from Borrow Area No. 2 seepage collection system
- Water volumes transferred to the mechanical evaporators

The water balance flow sheet is illustrated on Figure A.3 (Appendix A). The TSF water balance is reviewed monthly by the Tailings Engineer and on a quarterly and annual basis as part of the EOR reviews and annual inspection.

2.5 CLOSURE PLAN

Per the approved plan (DEQ and USFS, 2012) reclamation of disturbed areas at the Hertzler TSF is being carried out during operations to the maximum extent practicable. The objectives of the reclamation plan are to stabilize disturbed areas to prevent soil loss, minimize visual impacts, and prevent air and water pollution. These objectives are accomplished through surface drainage, concurrent reclamation of downstream embankment slopes and interim revegetation of borrow areas using approved seed mixes. Final reclamation of the Hertzler TSF will generally include the following:

- **Dewatering** - Natural drying and evaporation will reduce the moisture content in the tailings. In addition, the Basin Underdrain will promote consolidation of the tailings mass. At closure, ponded water on the tailings surface will be pumped out of the TSF. This water will be disposed of by spray evaporation

techniques over the exposed tailings surface or combined with mine water for disposal through LAD application. The Basin Underdrain may be operated for some time after closure.

- **Capping** - The TSF will be capped with cover material and soils. The capping layer will have a minimum thickness of 4 ft., which includes 2 ft. of borrow material and 2 ft. of soil or sub-soil.
- **Revegetation** - Revegetation measures will include seedbed preparation and seeding with approved seed mixes in the upper soil layer of the capping layer.

Final reclamation will include the construction of a closure spillway (i.e. drainage channel) for storm water runoff management. During closure, the underdrain waters will be redirected to either the LAD Storage Pond for land application or returned to the surface of the impoundment for management. During the post-closure period, the underdrain sump will be converted to a percolation structure by removing the liners and pumps; and then filling with gravel. At that point, the underdrain seepage will be directed to this percolation structure and either percolate or overflow onto native ground beyond the sump.

Additional information on the reclamation of the TSF is presented in the CORP, which is structured to meet the requirements of the *Montana Metal Mine Reclamation Act*.

3.0 OPERATIONS, MAINTENANCE AND SURVEILLANCE

3.1 INTRODUCTION

The Hertzler TSF components and associated facilities are shown on Figure 2.2. These components and facilities must be inspected and maintained regularly to ensure that any changes to the conditions, performance, or any potentially hazardous condition can be identified and promptly addressed. Selected photographs of the facility and associated components are included in Appendix D. Inspection and surveillance schedules are provided in Appendix C1.

The Concentrator Manager is responsible for ensuring that surveillance is carried out regularly. The Concentrator General Foreman is responsible for daily management of the TSF. The day shift Concentrator Supervisor directs the Surface Crew to carry out routine activities. The roles and responsibilities for the inspections are summarized in Section 1.2 of this TOMS Manual.

Routine inspections of the Hertzler TSF will be completed by the Concentrator General Foreman, Environmental Specialists, Concentrator Manager and Environmental Sustainability Manager as per Table C1.1 (Appendix C1).

Inspection reports should be reviewed by the Concentrator Manager and stored in SMC's electronic filing system. Located on SharePoint at [US Environmental Team - SWM - Inspections - Corporate Env](#). The quarterly dam inspections shall be presented to the management team during a closeout meeting.

Additional (non-routine) inspections may be required as outlined following any unusual event or observation (e.g., earthquake or extreme rainfall event). A summary of the recommended actions following an unusual event is outlined in Appendix C2.

If an inspection is performed by the EOR following an unusual event or observation, and corrective actions are identified by the EOR, the same procedural framework outlined in Section 4.1 for an annual inspection will be followed for preparing, submitting and implementing the corrective action plan and schedule.

The Concentrator Manager and/or Environmental Affairs Manager must be made aware of any unusual events or observations and must contact the EOR as required. Typical examples of unusual events and observations to be made during such walkovers are outlined in Appendix C2.

Inspection forms are provided in Appendix C3 to help guide the observation and surveillance process. The inspection forms cover major items related to the TSF and the associated facilities.

Copies of completed inspection forms, data sheets and field notes must be provided to, and kept in Stillwater's electronic filing system, by the Environmental Affairs Manager or Tailings Engineer. Any unusual observations must be reported to the Concentrator Manager and/or Environmental Compliance Manager immediately and will be responded to in accordance to the appropriate response level outlined in Section 5.3.

Additional details for each component of the facility are provided in the following sections.

The operation, maintenance and surveillance of the TSF is based on the use of current technologies. It is recognized that technology is evolving, and other technologies should be considered as part of the future monitoring for the TSF. Several technologies that should be considered as part of future monitoring include:

- Landsat images to track tailings pond water volumes and construction progress over months and years, both for ongoing monitoring and for forensic evaluation
- Airborne or satellite-based InSAR to monitor ground movements
- Land-based time-lapse photography to document construction

- Unmanned aerial vehicles (UAVs or drones) to collect high-resolution imagery, LiDAR or Photogrammetry surveys to collect detailed topographic data on a regular basis
- Real-time and continuous record keeping

3.2 TAILINGS EMBANKMENT

3.2.1 OVERVIEW

The tailings embankment is constructed of zoned earthfill materials and has been raised in stages using the downstream construction method as described in Section 2.3.2. Eight survey monuments were installed on the Stage 3 embankment crest to monitor for settlement and/or displacement. The survey monuments include Global Positioning System (GPS) monitoring units that are programmed to collect 24 readings per day. An as-built survey of the Stage 3 embankment crest was completed following the completion of Stage 3 construction in October 2015. An annual survey of the embankment crest should be completed by SMC for comparison with the as-built embankment survey. This survey could be completed with conventional surveying methods or using a drone or other technology. Three slope inclinometers are located along the downstream toe of the east and north embankments to monitor for potential movement in the embankment foundation. Vibrating wire piezometers (VWPs) were installed at the base of each slope inclinometer to monitor pore pressures in the embankment foundations. Monitoring requirements for instrumentation are summarized in Section 3.7.

3.2.2 SURVEILLANCE AND MAINTENANCE

Regular surveillance of the embankments and associated structures should follow the schedule outlined in Appendix C1. Inspection forms are provided in Appendix C3. Typical observations to be made during surveillance include:

- Evidence indicating embankment structure deformation (e.g., slope bulging, cracks on the crest or crest settlement)
- Evidence indicating seepage, runoff or erosion
- Possible evidence suggesting internal erosion (piping) within the embankments (wet spots, seepage, etc.)
- Other unusual conditions in the TSF area

The embankments and associated structures do not require regular maintenance; however, specific maintenance items may be identified because of regular observations and surveillance of the embankments. Maintenance items may include:

- Fill erosion gullies with properly compacted soil material. Seed or riprap repaired areas to stabilize against future erosion
- Fill wildlife burrows
- Maintain grass cover by spraying weeds, fertilizing and watering as needed
- Maintain grading of the embankment crests to prevent potholes, rutting or other potential for standing water to accumulate
- Maintain fences to provide site security and to exclude livestock and wildlife from the embankments. Repair and/or revegetate damaged embankment surfaces.
- Perform regular inspections of the embankments and abutments to identify potential maintenance items

Additional inspections are required after any unusual event. Appendix C2 outlines additional observations that will need to be documented. Appropriate repairs to the TSF will be implemented should any damage occur from an unusual event.

3.3 TAILINGS BASIN

3.3.1 OPERATIONAL OBJECTIVES

The projected rate at which the tailings accumulate within the basin, combined with storage provisions for make-up and storm water, determine the schedule for raising the embankments. The filling curve and staged construction sequence is shown on Figure A.2 (Appendix A). The minimum freeboard requirement for the impoundment is 6 ft. which includes storage of the PMF and a dry freeboard allowance of 3 ft. for wave run-up. The maximum operating level is 6 ft. below the embankment crest (El. 5,030 ft.).

Tailings deposition is to cease if the pond level exceeds the maximum operating level and the removal of water from the pond will commence using the water reclaim system. There are no restrictions on the rate of filling or on the rate of drawdown for the supernatant pond, with respect to dam safety.

The tailings basin is lined with a geosynthetic lining system and a basin underdrain is installed above the liner along the base of Cells 1 and 2. Surveillance and maintenance for tailings basin filling, geosynthetic lining systems and the basin underdrains is required as part of the operation of the tailings basin. VWP's are installed in the Basin Underdrain to monitor the response to pumping of the basin underdrain. Monitoring requirements for the piezometers are summarized in Section 3.7.

3.3.2 SURVEILLANCE AND MAINTENANCE

The pond level must be at least 6 ft. below the crest elevation under normal operating conditions. Emergency procedures, discussed in Section 5, must be followed if the pond exceeds the maximum operating level. Regular inspections of the pond level must be carried out as part of the routine inspections according to the schedule outlined in Appendix C1 and the pond elevation should be recorded on a monthly basis. Inspection forms are included in Appendix C3.

Additional pond level inspections are required after an unusual event. The additional inspections are summarized in Appendix C2.

Maintaining the integrity of the geosynthetic lining system is integral for the safe operation of the TSF to minimize seepage from the TSF over the long-term. Inspection of the geomembrane should be completed as part of the routine monthly inspections according to the schedule outlined in Appendix C1. An inspection log is provided in Appendix C3. Typical observations to be made for the geosynthetics lining system during surveillance include:

- Identification of defects in the geomembrane such as tears and holes
- Damage or degradation to geomembrane as a result of environmental exposure (e.g., ice, wind, UV damage, etc.)
- Identification of excess tension and trampolining in the geomembrane

Appropriate repairs are to be completed by a third party geosynthetics installer if any defects or damage are identified.

Stillwater contracts a third-party geosynthetics installer to complete detailed inspections of the HDPE geomembrane on a semi-annual basis. The semi-annual inspection reports include a summary of repairs made to the HDPE geomembrane and are kept on file in the Environmental Department and/or on SMC's electronic filing system.

Operation of the Basin Underdrains minimizes the head on the geomembrane thereby reducing the potential for seepage from the facility and promoting consolidation of the deposited tailings. The Basin Underdrains

should be operated continuously. Typical observations for the Basin Underdrains to be made during surveillance include:

- Monitoring and documenting the Basin Underdrain flows
- Recording volumes pumped from the Cell 1 and Cell 2 Underdrain Sumps
- Recording the volume of water transferred to the LAD Storage Pond
- Monitoring the clarity of water from the Basin Underdrain return pipeline
- Monitoring the Basin Underdrain pipeline for ice buildup during freezing conditions

The VWP's installed in the Cell 1 and Cell 2 Basin Underdrains were installed to confirm the effectiveness of the underdrains. The VWP's monitor the pressure in the underdrains and the response to the Basin Underdrain pumping. Monitoring requirements for the VWP's are summarized in Section 3.7. Close monitoring of the pond elevation, depth, area and volume is important for the following reasons:

- To ensure that there is a sufficient volume of water available as make-up water while the pond is frozen and precipitation is at a minimum
- To enable monitoring of the supernatant pond depth/area/volume so that tailings characteristics such as settled dry density can be determined
- To monitor water recoveries
- To enable the correlation of the pond level with other data, such as the pore pressures (from the VWP's) and underdrain flow rates

3.4 SEEPAGE COLLECTION SYSTEM

There is no external seepage collection system for the Hertzler TSF. If additional seepage collection measures are deemed to be necessary, based on environmental monitoring data, a seepage collection system would be designed and implemented. This TOMS Manual will be revised to integrate the required operating, monitoring and surveillance measures related to the seepage collection system.

3.5 TAILINGS DELIVERY SYSTEM

3.5.1 OPERATIONAL OBJECTIVES

The tailings slurry is pumped from the Concentrator to the Hertzler TSF. The components of the tailings delivery system are described in Section 2.3.5. Discharge locations for tailings delivery will be rotated whereby one group of spigots are operated for a period of time and then deposition is transferred to another group of spigots for a period of time, etc. This strategy controls the supernatant pond location and develops a well-drained and relatively flat tailings surface that optimizes the storage capacity within the impoundment. The updated tailings deposition plan for the TSF based on the October 2024 survey is illustrated in Appendix E. The tailings deposition plan will be updated annually based on the results of the bathymetric surveys. The tailings deposition plan is reviewed on an annual basis as part of the EOR annual inspection.

3.5.2 SURVEILLANCE AND MAINTENANCE

The tailings discharge pipeline does not require significant external adjustments during normal operations. However, the following must be implemented during operation of the pipeline:

- Do not close all of the valves along the tailings discharge pipeline as they may be permanently blocked from sanding or suffer damage from excessively high pressures.
- Ensure that there is an open pathway for tailings to exit the pipeline before switching tailings lines or after any spigots are relocated.
- Flush the pipeline with water prior to shut down or relocation.

The tailings delivery and discharge pipelines will be inspected and maintained regularly to ensure that the system operates properly. The tailings discharge locations are noted during the routine inspections. Appendix C1 provides a schedule for regular surveillance of the tailings delivery system. Inspection forms are provided in Appendix C3. Typical surveillance observations should seek to identify:

- Locations of excessive wear of the pipeline
- Any evidence indicating leakage from the pipeline
- Wear at the bends on the butt-welded joints in the section of the pipeline installed on surface at the TSF
- Identification of pipe sections that are worn on one side that may be rotated so the unworn section conveys the tailings; or worn sections must be replaced

Additional inspections are required after an unusual event. Appendix C2 outlines additional observations that will need to be documented. Repairs to the system may be required after any unusual event.

In addition, the Surface Supervisor conducts a visual inspection and measurement of the HDPE inner sleeve thickness at each automated vault location. This inspection is performed every 5 years and is documented by the Surface Supervisor. Documentation of this inspection is maintained in the Environmental Department offices and/or as an electronic copy in Stillwater's electronic filing system.

3.6 WATER RECLAIM SYSTEM

3.6.1 OPERATIONAL OBJECTIVES

Supernatant water is recycled from the Hertzler TSF to the SWM site for use as process water in the Concentrator. The components of the tailings water reclaim system are described in Section 2.3.6. The reclaim pumps can be operated from the Concentrator control room or from the breaker panel located on the crest of the TSF embankment adjacent to the reclaim manifold.

The reclaim pipeline does not require any external adjustments during normal operations. However, the reclaim system should be drained during maintenance periods or during a prolonged shutdown under extreme cold conditions.

3.6.2 SURVEILLANCE AND MAINTENANCE

The water reclaim system shall be inspected according to the schedule outlined in Appendix C1 and an inspection log will be completed as provided in Appendix C3. Typical items to inspect during surveillance of the reclaim pipeline include:

- Flow rates
- Locations of excessive wear of the pipeline
- Any evidence indicating leakage from the pipeline

- Monitor supernatant pond and reclaim pump elevations
- Monitor the tailings surface elevation adjacent to the reclaim pumps
- Ice buildup around the reclaim pumps and pipelines during freezing conditions

Additional inspections are required after any unusual event. Appendix C2 outlines additional observations that need to be documented.

3.7 INSTRUMENTATION

3.7.1 OPERATIONAL OBJECTIVES

Instrumentation is installed to assist with the monitoring of the tailings impoundment in order to evaluate compliance with design objectives. The instrumentation includes the following:

- Survey Monuments on the Stage 3 embankment crest to measure vertical and lateral movement of the embankment.
- Slope Inclinometers at the downstream toe of the embankment to monitor potential movement in the foundation.
- VWPs in the Basin Underdrains to monitor the effectiveness of the Basin Underdrain.
- Groundwater Monitoring Wells to monitor water levels and quality downstream of the TSF. Water quality is monitored and reported separately under the Water Resources Monitoring Plan.

The locations of the survey monuments, slope inclinometers and piezometers are shown on Figure A.1 (Appendix A). The locations of the monitoring wells are shown on Figure 2.2.

3.7.2 SURVEILLANCE AND MAINTENANCE

Instrumentation components are regularly monitored. Instrumentation is connected to and viewable in real-time in GeoExplorer, an instrumentation monitoring software package (NavStar, 2017). The instrumentation data is collected, plotted and reported according to the schedule outlined in Appendix C1. The instrumentation data is reviewed by the EOR on a quarterly basis. The EOR must be notified of any anomalous trends or values above the specified trigger levels. Additional readings and inspections as outlined in Appendix C2 will be required after any unusual event or observation. The survey monuments, slope inclinometers, vibrating wire piezometers locations and associated trigger levels are provided in the QRFG (Appendix A1).

The instruments may require occasional maintenance which could include:

- The piezometer wires may need to be cut and re-attached if the readout box is unable to acquire data.
- Piezometer wires that are exposed may become corroded and may need to be trimmed until a fresh surface is exposed to allow readings to be taken.
- Protection of survey monuments from equipment traffic on embankment crest and other disturbances may be required during maintenance work. Survey monuments need to be re-established and protected after construction of each new embankment stage.
- Instrumentation must be maintained according to the manufacturer's instructions.

3.8 LAD STORAGE POND

3.8.1 OPERATIONAL OBJECTIVES

The LAD Storage Pond is operated on an as-needed basis in accordance with the design and operating criteria. Treated mine water is pumped to the LAD Storage Pond from the Mine Site for temporary storage prior to being applied in the LAD area via irrigation pivots or at the percolation ponds. The LAD Storage Pond is lined with an HDPE geomembrane to reduce seepage from the basin. Additional monitoring of the LAD system is completed by SMC personnel and is outside of the scope of this TOMS Manual.

3.8.2 SURVEILLANCE AND MAINTENANCE

The LAD Storage Pond will be inspected according to the schedule outlined in Appendix C1. An inspection log is provided in Appendix C3. Typical observations to be made during surveillance include:

- Water levels in the LAD Storage Pond
- Evidence indicating leakage from the pipelines
- Evidence of slope deformation or erosion (i.e., cracks at the crest)
- Evidence indicating seepage out of the pond
- Condition of the HDPE geomembrane liner

Additional inspections are required after an unusual event. Appendix C2 outlines additional observations that will need to be documented.

3.9 SURFACE WATER MANAGEMENT

There are no upstream catchment areas reporting to the Hertzler TSF. Meteoric water reporting to the TSF includes direct precipitation to the tailings basin and runoff from the embankment crest. Surface water management measures for the facility include ditches and sedimentation basins located along the access roads and adjacent areas. The ditches and sedimentation basins are inspected and maintained as part of the Storm Water Pollution Prevention Plan (SWPPP).

4.0 SAFETY INSPECTIONS, REPORTING AND REVIEWS

4.1 QUARTERLY AND ANNUAL INSPECTIONS

Quarterly and Annual inspections of the TSF and associated facilities are required to evaluate current and past performance and to observe potential deficiencies in condition, performance and/or operation. The Environmental Sustainability Manager is responsible for arranging the inspections. The level of dam safety evaluation will be based on detailed observations made by the EOR and/or Deputy EOR and on relevant information on the TSF operations collected by site personnel. Additional reviews may also be required to follow up on reports of unusual events or observations.

The Environmental Sustainability Manager, Concentrator Manager, Tailings Engineer, and/or Environmental Specialist will accompany the EOR during the annual inspection. The EOR will evaluate the safety of the TSF and incorporate a review of the following:

- TOMS Manual
- The availability of all documents pertaining to dam safety on site
- Site surveillance practice
- Changes in relevant regulatory requirements since the last inspection

The EOR will issue an annual inspection report after completing the review. The report will include the following at a minimum:

- Conclusions on the status of the TSF
- Statement indicating completion of recommendations from previous inspections and reviews
- New recommendations if necessary

The annual inspections and reporting for the Hertzler TSF includes the following:

- The EOR shall inspect the TSF annually during operations or as required during closure pursuant to a reclamation plan.
- The EOR will prepare a report describing the scope of the inspection and recommended actions for the proper operation and maintenance of the Hertzler TSF.
- The EOR will submit the report to Stillwater and the DEQ and will immediately notify the DEQ and Stillwater if the facility presents an imminent threat or has the potential for an imminent threat to human health or the environment.

Should the annual inspection report contain recommendations, the following actions will be taken:

- Stillwater will prepare a Corrective Action Plan (CAP) and schedule to guide the implementation of the recommendations made by the EOR.
- Stillwater will submit the CAP and implementation schedule to the EOR.
- The EOR will review the CAP and schedule and verify that the proposed corrective actions are reasonably expected to effectively address the recommendations made in the annual report.
- Stillwater will submit the verified CAP and schedule to the DEQ within 120 days following the date of the inspection.
- Stillwater will implement the CAP in accordance with the implementation schedule.

4.2 INDEPENDENT REVIEWS

Independent reviews are required for the TSF as per Stillwater's internal corporate governance document and GISTM guidelines. The reviewers and review frequency are summarized in Table 4.1

Table 4.1 Independent Review Summary

Reviewer	Frequency
ITRB	The ITRB completes annual reviews of the TSF as per Stillwater's internal corporate governance document.
IRP	As part of the Hertzler TSF Stage 4 and Stage 5 design review, the IRP's scope includes for inspections during the Stage 4 and Stage 5 construction as well as periodic reviews as per the legislation 82-4-380 MCA.
Independent Review (DSRs)	SMC has committed to completing additional third-party Dam Safety Reviews (DSRs) for the Hertzler TSF every 5 years to satisfy Sibanye Stillwater's corporate commitment to the Global Industry Standard on Tailings Management (GISTM). A third-party review of the TSF was completed in 2020 and the next review is scheduled for 2025.

5.0 EMERGENCY PREPAREDNESS PLAN

5.1 GENERAL

An Emergency Preparedness Plan (EPP) (Stillwater, 2025a) has been developed to enable SMC to:

- Identify emergency and hazardous conditions threatening the facility
- Expedite effective response actions to prevent failure
- Reduce loss of life, minimize property damage, and protect the environment, should failure of the facility occur

In the event that Stillwater is unable to comply with any of the terms and conditions of the operating permit, that would lead to emergency or hazardous conditions that would threaten the facility, due to any cause, Stillwater will:

- Immediately notify the Montana Department of Environmental Quality (MDEQ) and United States Department of Agriculture, Forest Service (USFS) CGNF of the emergency or hazardous conditions that threaten the facility and the response actions taken to prevent failure.
- Immediately take action to stop, contain, and clean up correct the problem, and if applicable, immediately conduct sampling and analysis of any release.
- Submit a detailed written report to the MDEQ and USFS CGNF ten days. The report will contain a description of the condition; details including date and time and monitoring conducted; if the problem has not been corrected, the anticipated time it is expected to continue; and the steps taken or planned to reduce, eliminate, and prevent recurrence of the condition.

5.2 DAM BREACH RUNOUT

A Dam Breach Assessment (DBA) has been completed to estimate the potential runout and inundation extents for a hypothetical dam breach. The DBA considers credible failure modes related to hypothetical structural, foundation and /or erosional failures.

The estimated inundation extents for a hypothetical failure have been used to inform the development of the EPP to plan for a flash flood downstream of the TSF due to a release of water and tailings solids. The identified residences and roads that are at risk downstream of the TSF have been identified from the dam breach inundation maps that are included in the EPP (Stillwater, 2025a).

5.3 EMERGENCY CONDITIONS

The EPP (Stillwater, 2025a) will be implemented if emergency conditions are expected or have been identified. Two levels of emergency conditions (or warning signs) can be identified with respect to the site operations. These are defined as follows:

- **Level 1** - Conditions that represent a potential emergency are those that if sustained or allowed to progress may result in an emergency, but no emergency situation is imminent.
- **Level 2** - An emergency condition is defined by either failure of a significant component of the TSF and/or associated facility, or a significant failure of the performance of a component of the TSF that would result in a potential loss of life and/or property damage. Such failure may have already occurred or be imminent.

For each level of emergency condition, the EPP identifies subsequent response and/or corrective actions, including emergency notification contacts.

6.0 REFERENCES

- Knight Piésold Ltd. (KP), 2022. *Hertzler Tailings Storage Facility Design Basis Report*. December 22. North Bay, Ontario. Ref. No. NB101-66/44-3 Rev 0.
- Montana Department of Environmental Quality (DEQ) and U.S.D.A. Forest Service (USFS), 2012. *Record of Decision for the Final Environmental Impact Statement for the Stillwater Mining Company's Revised Water Management Plans and Boe Ranch LAD*.
- NavStar Geomatics Ltd. (NavStar), 2017. *GeoExplorer 6*. Version 2.4.0.0. Kelowna, British Columbia.
- Sibanye Stillwater (Stillwater), 2025a. *Hertzler Tailings Storage Facility - Emergency Preparedness Plan (EPP)*. February 25. Nye, Montana. V2.1.
- Sibanye Stillwater (Stillwater), 2025b. *Nye Tailings Operations, Maintenance and Surveillance (TOMS) Manual*. July 9. Nye, Nye, Montana. V1.6.
- State of Montana (MT), 2024. *Montana Code Annotated (MCA) 2017*. Title 82. Minerals, Oil, and Gas. Chapter 4. Reclamation. Part 3. Metal Mine Reclamation.

7.0 CERTIFICATION

This report was prepared and reviewed by the undersigned.

We hereby certify that the following:

- This TOMS Manual is consistent with the design of the Stage 3 Hertzler TSF;
- The inspections and monitoring described in this TOMS Manual are reasonably sufficient to ensure the Stage 3 Hertzler TSF will perform as intended and will reasonably be expected to detect deviations if they occur; and
- The Emergency Preparedness Plan (EPP) describes reasonable measures that can be taken to protect human health and the environment.

Prepared:

Zane Leonard, P.Eng.
Senior Tailings Engineer - Sibanye Stillwater

Prepared:



Craig N. Hall, P.Eng.
Knight Piésold Ltd. - Managing Principal
Deputy Engineer of Record for Hertzler Tailings Storage Facility

Reviewed:

Matt Wolfe
Environmental Sustainability Manager - US Region - Sibanye Stillwater

The Engineer of Record has reviewed this manual and hereby certifies the following:

- This TOMS Manual is consistent with the design of the Stage 3 Hertzler TSF;
- The inspections and monitoring described in this TOMS Manual are reasonably sufficient to ensure the Stage 3 Hertzler TSF will perform as intended and will reasonably be expected to detect deviations if they occur; and
- The Emergency Preparedness Plan (EPP) describes reasonable measures that can be taken to protect human health and the environment.



Reviewed:

Ken J. Brouwer, P.E.
Knight Piésold Ltd. – Principal Engineer
Engineer of Record for Hertzler Tailings Storage Facility

Appendix A

Quick Reference Field Guide

(Pages A-1 to A-12)

APPENDIX A

QUICK REFERENCE FIELD GUIDE

1.0 INTRODUCTION

This Quick Reference Field Guide (QRFG) provides a concise summary for the operation, monitoring and surveillance of the Stage 3 Hertzler Tailings Storage Facility (TSF). The Quantitative Performance Parameters (QPPs), instrumentation trigger levels and locations, and tailings and water management details for the tailings impoundment and Land Application and Disposal (LAD) Storage Pond are summarized below.

2.0 QUANTITATIVE PERFORMANCE PARAMETERS

QPPs represent measurable parameters to confirm that the TSF is being operated in accordance with the design intent. The QPPs for the Hertzler TSF and LAD Storage Pond are summarized on Tables A.1 and A.2, respectively.

Table A.1 Stage 3 Hertzler TSF Quantitative Performance Parameters

Parameter	Value
Crest Elevation	5,036 ft.
Minimum Freeboard	6 ft.
Maximum Operating Level	5,030 ft.
Crest Width	30 ft.
Embankment Slope Angle	Upstream: 2.5H:1V Downstream: 2H:1V
Minimum Operating Pond Volume	50 M gal
Maximum Operating Pond Volume	Filling El. 5,000 to 5,010 ft.: 200 to 250 M gal Filling El. 5,010 to 5,020 ft.: 150 to 200 M gal Filling El. 5,020 to 5,030 ft.: < 150 M gal


Table A.2 LAD Storage Pond Quantitative Performance Parameters

Parameter	Value
Crest Elevation	4,884 ft.
Minimum Freeboard	4 ft.
Maximum Operating Level	4,880 ft.
Crest Width	30 ft.
Embankment Slope Angle	Upstream: 3H:1V Downstream: 3H:1V
Operating Pond	Maximum: 192 M gal


3.0 INSTRUMENTATION

Instrumentation has been installed in the Hertzler TSF to monitor the performance of the embankment and the Cell 1 and Cell 2 Basin Underdrains. The embankment survey monuments, embankment slope inclinometers and select vibrating wire piezometers (VWPs) are designated as QPPs for monitoring the performance of the TSF. The QPPs specify a displacement trigger level for the survey monuments and slope inclinometers and a piezometric trigger elevation for the piezometers. If trigger levels for the survey monuments, slope inclinometers and piezometers are reached, appropriate notifications are provided, and Unusual Event monitoring and reporting is triggered. The instrumentation locations for the tailings impoundment are shown in Figure A.1. The slope inclinometer sections are illustrated on Figure A.2. Instrumentation trigger levels are summarized in Table A.3, A.4, A.5 and A.6.


If an instrumentation trigger level is exceeded, inspections of the embankment crest and slopes are required to be completed to determine if indications of displacement such as cracking, sloughing, slumping or seepage are present. If no indications of displacement or adverse operating conditions are observed, the inspection observations should be documented, and the instrumentation should continue to be monitored. If indications of displacement or adverse operating conditions are observed, refer to the Emergency Preparedness Plan (EPP) (Stillwater, 2025) and contact the Engineer of Record (EOR).

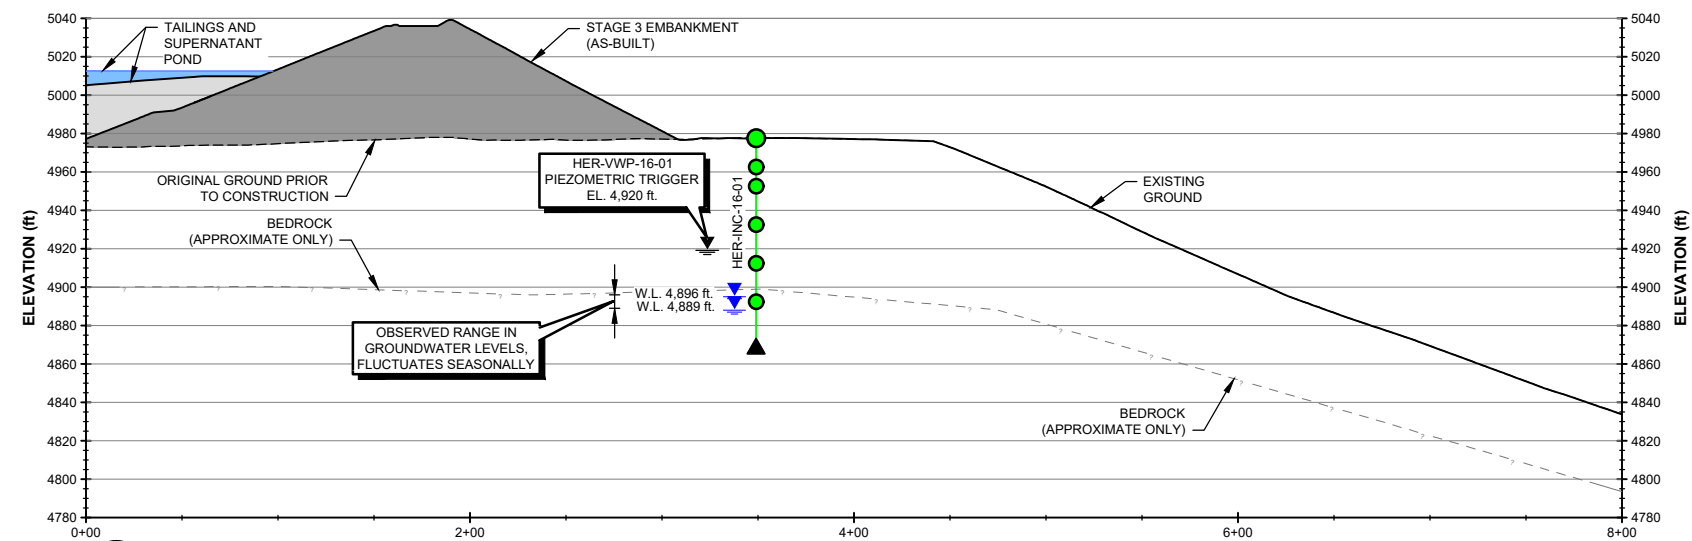

1 **SECTION**
A.1 **HER-INC-16-01**
FIG **SCALE A**

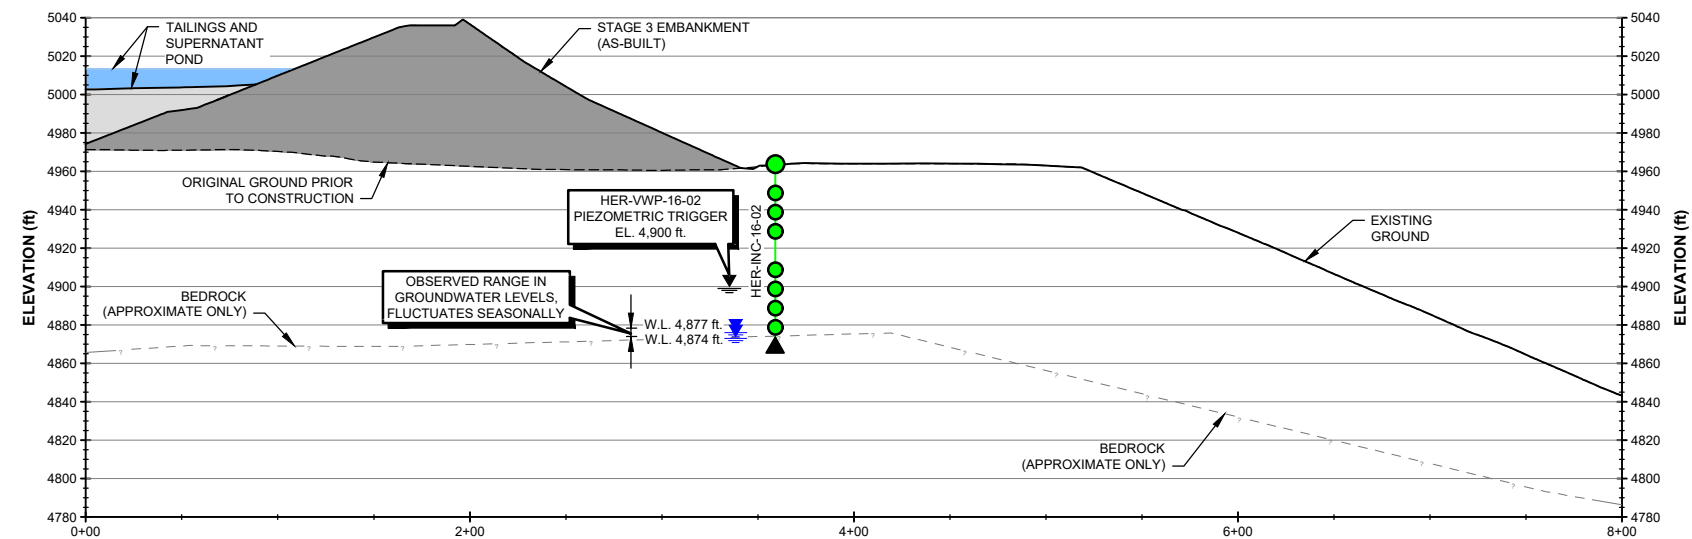

2 **SECTION**
A.1 **HER-INC-16-02**
FIG **SCALE A**

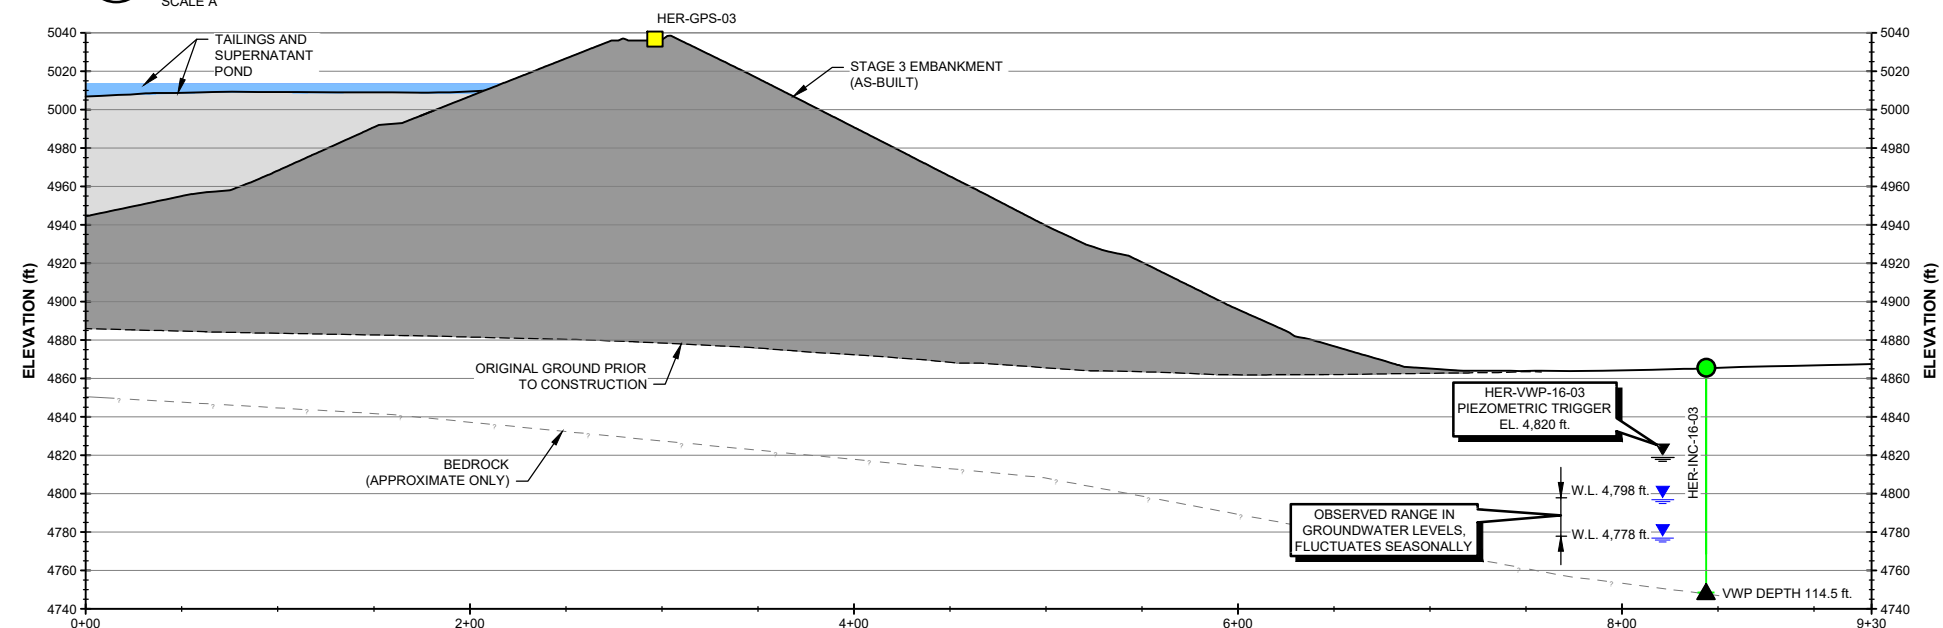

3 SECTION
A.1 HER-INC-16-03
FIG SCALE A

- LEGEND:**

-  WATER
 TAILINGS
 EMBANKMENT FILL
 BEDROCK (APPROXIMATE ONLY)
 SLOPE INCLINOMETER LOCATION
 MEASURED WATER LEVEL
 PHREATIC SURFACE TRIGGER LEVEL
 VIBRATING WIRE PIEZOMETER LOCATION
 STAGE 3 SURVEY MONUMENTS

NOTES:

1. SECTIONS BASED ON STAGE 3 AS-BUILT SURVEY DATA PROVIDED BY RED LODGE SURVEYING NOVEMBER 17, 2015. OTHER DETAILED TOPOGRAPHY PROVIDED BY HKM ENGINEERING INC. SEPTEMBER 24, 2004, FEBRUARY 10, 2000, AND SEPTEMBER 29, 2000.
2. DIMENSIONS AND ELEVATIONS ARE IN FEET UNLESS NOTED OTHERWISE.



SIBANYE STILLWATER			
STILLWATER MINE			
HERTZLER TSF SLOPE INCLINOMETER SECTIONS			
 Knight Piésold CONSULTING	PIA NO. NB101-66/49		REF NO. NB25-00040
	FIGURE A.2		REV 0

Table A.3 Survey Monument Trigger Levels

Embankment Survey Monuments	Standard Operations	Orange Trigger Level	Red Trigger Level
HER-GPS-01	24-hour average displacement (ΔE , ΔN , ΔE) < 2 in. (25 mm) and 24-hour average 3D displacement < 2 in. (50 mm)	24-hour average displacement (ΔE , ΔN , ΔE) > 2 in. (25 mm) or 24-hour average 3D displacement > 2 in. (50 mm)	N/A
HER-GPS-02			
HER-GPS-03			
HER-GPS-04			
HER-GPS-05			
HER-GPS-06			
HER-GPS-07			
HER-GPS-08			
Monitoring and Reporting Requirements	Regular Instrumentation Monitoring and Reporting	Increase monitoring frequency, inspect Survey Monument and Embankment and Complete Unusual Condition Report Inform RTFE	Inform General Manager and Environmental Manager
Responsible Person	Senior Tailings Engineer	Senior Tailings Engineer, EOR	Senior Tailings Engineer, EOR, RTFE

Table A.4 IPI Slope Inclinator Trigger Levels

Embankment Slope Inclinator	Standard Operations	Orange Trigger Level > 0.4 in. (10 mm) ^[1]	Red Trigger Level > 1.0 in. (25 mm) ^[1]
HER-IPI-16-01-01	<0.188 Degrees Displacement	>0.188 Degrees Displacement	>0.47 Degrees Displacement
HER-IPI-16-01-02			
HER-IPI-16-01-03	<0.094 Degrees Displacement	>0.094 Degrees Displacement	>0.235 Degrees Displacement
HER-IPI-16-01-04			
HER-IPI-16-01-05			
HER-IPI-16-02-01	<0.188 Degrees Displacement	>0.188 Degrees Displacement	>0.47 Degrees Displacement
HER-IPI-16-02-02			
HER-IPI-16-02-03			
HER-IPI-16-02-04	<0.094 Degrees Displacement	>0.094 Degrees Displacement	>0.235 Degrees Displacement
HER-IPI-16-02-05	<0.188 Degrees Displacement	>0.188 Degrees Displacement	>0.47 Degrees Displacement
HER-IPI-16-02-06			
HER-IPI-16-02-07			
Monitoring and Reporting Requirements	Regular Instrumentation Monitoring and Reporting	Level 1 exceedances require daily review of inclinometer readings to be implemented and contingency or remedial measures to be developed if trigger levels continue to be exceeded Inform RTFE	Level 2 exceedances require an Unusual Condition investigation and action plan and completion of downhole manual survey Inform General Manager and Environmental Manager
Responsible Person	Senior Tailings Engineer	Senior Tailings Engineer, EOR	Senior Tailings Engineer, EOR, RTFE

NOTES:

1. TRIGGER LEVELS WERE CONVERTED TO DEGREES OF DISPLACEMENT FOR USE IN SIBANYE STILLWATER'S MONITORING SYSTEM, GEOEXPLORER. DEGREES OF DISPLACEMENT ARE CALCULATED BASED ON 10 OR 20 FT. TILTMETER SPACING.

Table A.5 Manual Survey Slope Inclinator Trigger Levels

Embankment Slope Inclinator	Standard Operations	Orange Trigger Level > 0.4 in.	Red Trigger Level > 1.0 in.
HER-IPI-16-03	<0.4 inch	> 0.4 inch.	> 1 inch
Monitoring and Reporting Requirements	Regular Instrumentation Monitoring and Reporting	Level 1 exceedances require increase of inclinometer readings to be implemented and contingency or remedial measures to be developed if trigger levels continue to be exceeded Inform RTFE	Level 2 exceedances require a completion of downhole camera inspection of inclinometer casing Inform General Manager and Environmental Manager
Responsible Person	Senior Tailings Engineer	Senior Tailings Engineer, EOR	Senior Tailings Engineer, EOR, RTFE

Table A.6 Vibrating Wire Piezometers Trigger Levels

Piezometers	Standard Operations	Orange Trigger Level	Red Trigger Level
Embankment Slope Inclinator VWP^[1]			
HER-VWP-16-01	< 4,920 ft.	> 4,920 ft.	N/A
HER-VWP-16-02	< 4,900 ft.	> 4,900 ft.	
HER-VWP-16-03	< 4,820 ft.	> 4,820 ft.	
Monitoring and Reporting Requirements	Regular Instrumentation Monitoring and Reporting	Increase Monitoring Frequency, Review Piezometer Data with precipitation and Hertzler flow monitoring records to determine reason for exceedance and Complete Unusual Condition Report Inform RTFE	Inform General Manager and Environmental Manager
Responsible Person	Senior Tailings Engineer	Senior Tailings Engineer, EOR	Senior Tailings Engineer, EOR, RTFE
Basin Underdrain VWP^[2]			
HER-VWP-UD-02	No trigger level - underdrain performance monitoring only (Piezo head fluctuated with Basin Underdrain pumping) ^[3]		
HER-VWP-UD-04			
HER-VWP-UD-06			

NOTES:

1. MONITORS PHREATIC SURFACE IN THE EMBANKMENT FOUNDATION.
2. MONITORS BASIN UNDERDRAIN RESPONSE TO PUMPING.
3. NOTIFY THE ENGINEER OF RECORD IF BASIN UNDERDRAIN PIEZOMETERS ARE NOT RESPONDING TO BASIN UNDERDRAIN PUMPING.

4.0 TAILINGS AND WATER MANAGEMENT

4.1 FILLING SCHEDULE

The base case Stage 3 TSF filling schedule is illustrated on Figure A.3. Tailings deposition must cease if the supernatant pond level exceeds the maximum operating level and the removal of water from the TSF basin is required to immediately commence using the water reclaim system. There are no restrictions on the rate of filling or on the rate of drawdown for the supernatant pond, with respect to dam safety. The location of the tailings discharge and reclaim water pipework is shown on Figure A.1.

The TSF basin filling schedule depends on the incremental addition of settled tailings solids as well as changes in the supernatant pond volume. Stillwater Mine updated their projected mine plan in Q3 2024, significantly reducing the tailings throughput from 2025 to 2027 and then ramping production up beginning in 2028. The filling schedule on Figure A.3 reflects the updated mine plan. The filling schedule is reviewed on a quarterly basis and will reflect adjustments to mine plan and supernatant pond volumes confirmed by periodic bathymetric surveys.

Filling Curve with Static 443M gal Pond Volume (No Pond Volume Mitigation)

An updated short term filling curve with a 443 M gal pond volume based on the October 2024 bathymetric survey is shown on Figure A.3. The calculations assume that 55% of the tailings are deposited to the TSF and the settled dry tailings density is at 64 lb/ft³. The updated filling curve is based on the recorded water level at the time of the October 2024 survey of El. 5,013.3 ft. This base case condition indicates that the Stage 3 TSF would reach capacity in Q4 2031 with no further accumulation of excess water.

Gradual Reduction in Hertzler TSF Pond Volume to 150 M gal over 3 to 5 years (Base Case with Pond Volume Reduction)

Stillwater implemented corrective actions in 2024 to both arrest the ongoing volume accumulation and to facilitate further pond volume reduction within the Hertzler TSF. Stillwater anticipates that these TSF inflow reductions could result in a reduction of the Hertzler TSF pond volume by 70 to 100 M gal/year. Figure A.3 shows the pond volume reduction targets planned by Stillwater to facilitate a pond volume reduction down to 150 M gal within the next 3 to 4 years. The operating life of the Hertzler TSF would be extended to Q2 2033 with the pond volume reduced below the Quantitative Performance Pond volume target of 150 M gal.

.

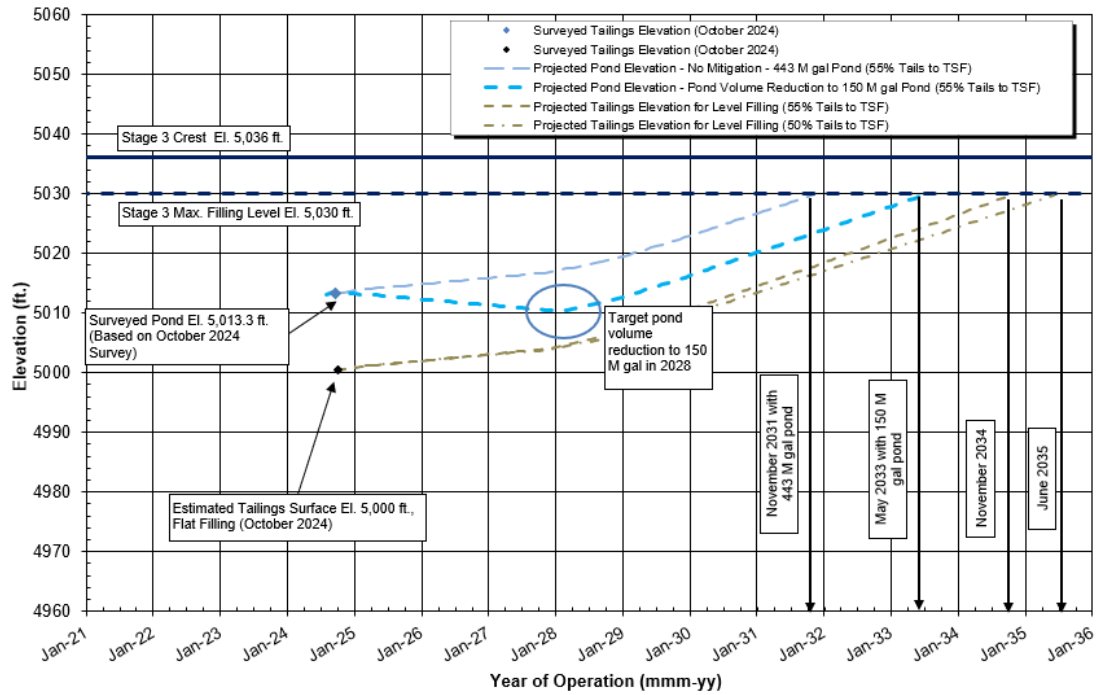


Figure A.3 TSF Filling Curve

4.2 WATER BALANCE

The water balance flowsheet for the TSF is illustrated in Figure A.4 with the average annual water additions and losses.

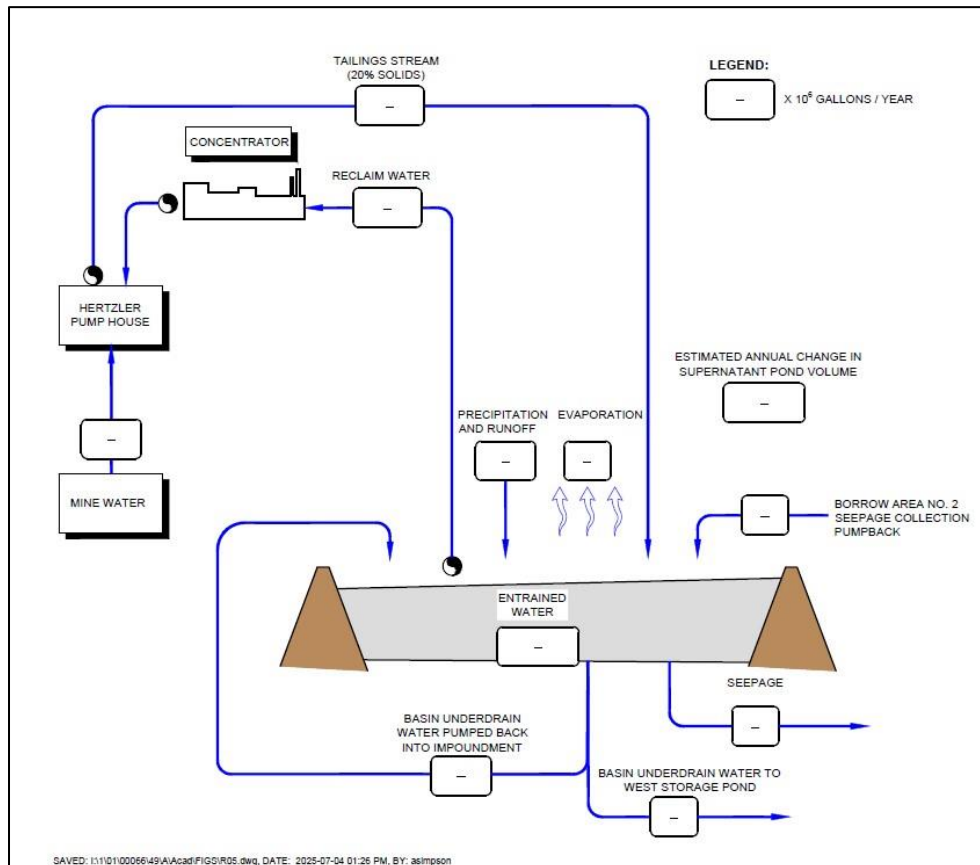


Figure A.4 Water Balance Flowsheet

4.3 LAD STORAGE POND

Treated mine water is pumped to the LAD Storage Pond for storage prior to spray application at the irrigation pivots. The depth-area-capacity curves for the LAD Storage Pond are illustrated in Figure A.5. If the pond level exceeds the maximum operating level, surplus water must be removed from the pond using the irrigation system.

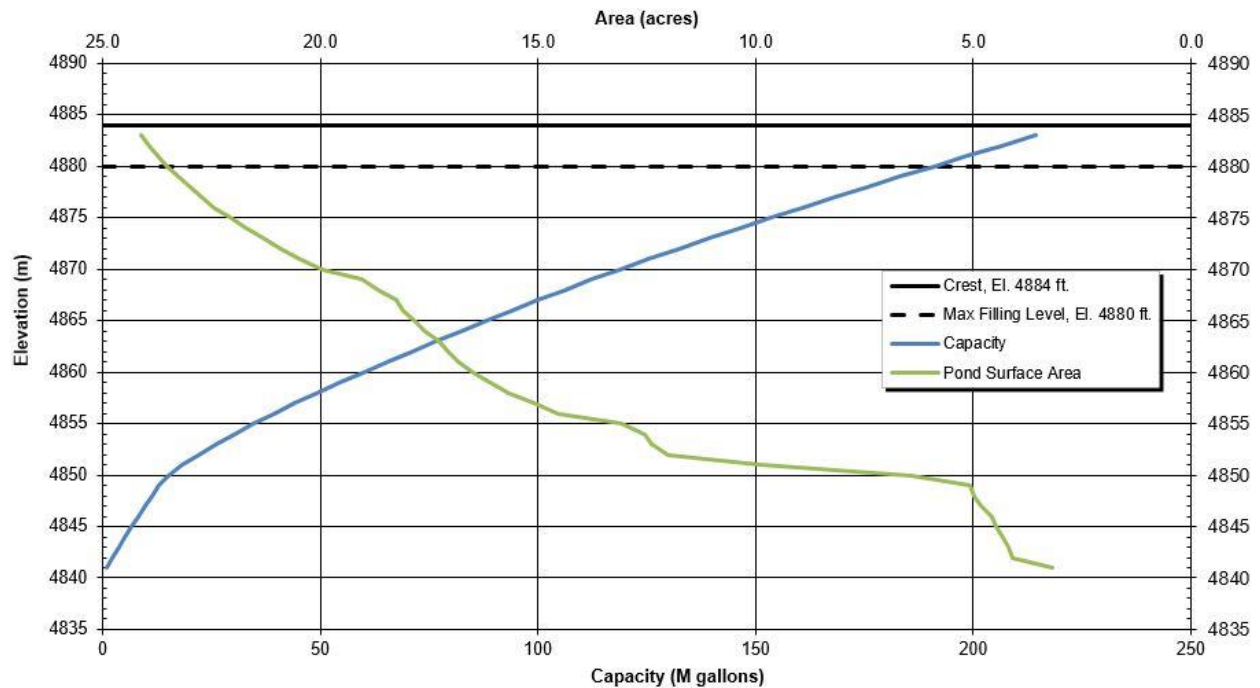


Figure A.5 LAD Storage Pond Depth-Area-Capacity Curves

Appendix B

References

(Page B-1)

APPENDIX B REFERENCES

- Knight Piésold Ltd. (KP), 1999. Hertzler Tailings Impoundment - Stage 1 Design Report. Ref. No. 31333/7-7, Rev 0.
- Knight Piésold Ltd. (KP), 1999. 1998/1999 Site Investigation Program. Ref. No. 31333/7-5, Rev 0.
- Knight Piésold Ltd. (KP), 1999. 1998/1999 Monitoring Well Installation Report (HMW-12 to 14). Ref. No. 31333/7-4, Rev A.
- Knight Piésold Ltd. (KP), 2000. Hertzler Tailings Impoundment - Report on Site Disturbances and Final Arrangement. Ref. No. 31333/7-8, Rev 1.
- Knight Piésold Ltd. (KP), 2000. Hertzler Tailings Impoundment - Report on Stability Assessment. Ref. No. 31333/7-9, Rev 2.
- Knight Piésold Ltd. (KP), 2001. Hertzler Tailings Impoundment - Stage 1 Construction Report. Ref. No. 31333/9-2, Rev 0.
- Knight Piésold Ltd. (KP), 2003. Hertzler Tailings Impoundment - Report on Stage 2 Site Disturbances. Ref. No. VA101-00066/4-2, Rev 1.
- Knight Piésold Ltd. (KP), 2003. Hertzler Tailings Impoundment - Stage 2 Design Report. Ref. No. VA101-00066/4-1, Rev 1.
- Knight Piésold Ltd. (KP), 2004. Hertzler Tailings Impoundment - Stage 2 Design Report. Ref. No. VA101-00066/4-1, Rev 2.
- Knight Piésold Ltd. (KP), 2005. Stage 2 Hertzler Tailings Impoundment - Stage 2 Construction Report. Ref. No. VA101-66/9-1, Rev 1.
- Knight Piésold Ltd. (KP), 2013. Technical Specifications for Stage 3 Hertzler Tailings Impoundment Construction. Ref. No. NB101-66/21-2, Rev 0.
- Knight Piésold Ltd. (KP), 2014. Hertzler Tailings Impoundment Stage 3 Design Report. Ref. No. NB101-66/21-1, Rev 1.
- Knight Piésold Ltd. (KP), 2016. Hertzler Tailings Impoundment Stage 3 Construction Report. Ref. No. NB101-66/27-1, Rev 0.
- Montana Department of Environmental Quality and U.S.D.A. Forest Service (DEQ), 2012. Record of Decision for the Final Environmental Impact Statement for the Stillwater Mining Company's Revised Water Management Plans and Boe Ranch LAD.
- Record of Decision - Amendment 010. Hertzler Impoundment and Mine Waste Management Plan, Stillwater.
- Stillwater Mining Company (SMC), 1996. Mine Waste Management Plan: Amendment to Permit #00118. April. Appendix I.
- Stillwater Mining Company (SMC), 2013. Attachment to 2012 Annual Report for Operating Permit #00118.

Appendix C

Inspection and Surveillance

Appendix C1

Inspection and Surveillance Schedule

Appendix C2

Unusual Events and Occurrences Requiring Non-Routine Walkovers

Appendix C3

Inspection Forms

Appendix C1

Inspection and Surveillance Schedule

(Page C1-1)

TABLE C1.1
SIBANYE STILLWATER
STILLWATER MINE
HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
INSPECTION AND SURVEILLANCE SCHEDULE

Print Jul-07-25 10:19:14

Component	Description	Operations	Inspection and Surveillance	Responsible Parties
Tailings Embankment	Perimeter embankment around the impoundment.	Maintain access roads on the embankment crest.	Inspect the embankments weekly and look for evidence indicating instability or deformation. Inspect downstream face weekly for evidence of seepage, runoff, erosion or piping. Take photographs of the embankments semi-annually .	Surface Supervisor Surface Supervisor Environmental Supervisor, Concentrator Manager
Tailings Basin	Process water and tailings solids storage in an HDPE lined basin. Basin underdrain layer to reduce seepage and promote tailings consolidation.	Pond required to store 72 hr PMP event plus provide an additional 3 ft. of freeboard. Maximum operating pond level is 6 ft. below the crest elevation during normal operations. Compare pond levels with design filling schedules. Relocate spigots as necessary to develop the tailings beach around the perimeter of the impoundment.	Record Tailings throughput daily . Inspect the tailings discharge location weekly and note the approximate extent of beach development in the facility. Inspect the tailings beach weekly . Note any sinkholes or excessive beach erosion. Inspect the geomembrane monthly . Measure and monitor the pond water levels weekly . Take photographs of the pond semi-annually . Determine the volume of the supernatant pond annually (prior to winter freeze-up) by sounding the pond depths from a boat.	Surface Supervisor Surface Supervisor Surface Supervisor, Surface Crew Surface Supervisor Surface Supervisor Environmental Supervisor, Concentrator Manager Concentrator Superintendent
Tailings Delivery System	Consists of the tailings delivery pipeline and discharge spigots around perimeter of impoundment.	Ensure that the discharge pipeline is fully flushed prior to relocating any pipework. Ensure that there is always an open path for the tailings to exit during operations and discharge relocation. Keep spigot points downstream of active spigotting sections open to allow the unused pipeline to drain. Maintain non-erosive laminar flow over the tailings beaches.	Inspect the pipeline weekly for evidence indicating leakage. Conduct detailed inspections of the tailings pipeline during pipeline maintenance . Take photographs of the tailings delivery spigots semi-annually . Inspect and measure HDPE inner pipe wall thickness at each vault every 5 years .	Surface Supervisor, Surface Crew Concentrator Superintendent Environmental Supervisor, Concentrator Manager Surface Supervisor, Surface Crew
Reclaim Water Pipeline	Consists of the 3 inclined reclaim pumps and pipes, reclaim manifold from tailing impoundment to the mill, reclaim water pipeline and booster pump station adjacent to the mine site.	The inclined pumps and booster pump may be controlled from the Mill control room, or breather panel on the dam crest. Monitor the water and tailings elevation relative to the inclined pump location.	Inspect the pipeline weekly for evidence of leakage. Monitor and assess the inclined pump elevation quarterly and determine if pumps need to be raised. Conduct detailed inspections of the reclaim pipeline during pipeline maintenance . Take photographs of the reclaim pipeline semi-annually. Inspect and measure HDPE inner pipe wall thickness at each vault every 5 years .	Surface Supervisor, Surface Crew Surface Supervisor, Surface Crew Surface Supervisor Environmental Supervisor, Concentrator Manager Concentrator Manager, Surface Supervisor
LAD Storage Pond	Mine water, storage pond lined with HDPE geomembrane. Pumps and pipework to transfer water to irrigation pivots and/or percolation ponds.	Maximum operating pond level is 4 ft. below the crest elevation during normal operations.	Inspect the geomembrane twice annually . Measure and monitor the pond water levels weekly . Take photographs of the pond semi-annually.	Environmental Specialist Surface Supervisor, Surface Crew Environmental Supervisor, Concentrator Manager
Instrumentation	Includes vibrating wire piezometers, survey monuments, groundwater monitoring wells and slope inclinometers.	Piezometers and slope inclinometers connected to LoggerNet data collection system. Survey monuments transmit data to Navstar monitoring system. Instrumentation data plotted and reviewed on Navstar's GeoExplorer software, SMC's internal monitoring system for slope inclinometers and piezometers. Check condition of instrumentation and complete maintenance as required. Make note of any instrumentation that is not functioning. Follow manufacture's instructions for instrumentation operation. Notify EOR of any anomalous trends in the data.	Review instrumentation data monthly . Check condition of instrumentation as required Provide instrumentation data quarterly to the EOR for review. Monitor water levels in each groundwater monitoring well and obtain water quality samples as required by permits. Data is compiled by the Environmental Specialist and a reported to the appropriate agencies as required by the permit.	Environmental Specialist Environmental Specialist Environmental Specialist Environmental Specialist

I:\1101\00066149\A\Report\Hertzler TOMS Update - V1.7\App C - Inspection and Surveillance\Table C1.1 - Inspect_Sched.xlsx\Table C1.1

Appendix C2

Unusual Events and Occurrences Requiring Non-Routine Walkovers

(Page C2-1)

TABLE C2.1

SIBANYE STILLWATER
STILLWATER MINE

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
UNUSUAL EVENTS AND OCCURRENCES REQUIRING NON-ROUTINE WALKOVERS

Print Jul-07-25 10:20:39

Event/Observation	Recommended Action
Extreme rainfall	Monitor the TSF pond level. Confirm pond level is below the maximum operating level. Monitor the LAD Storage Pond. Confirm pond level is below the maximum operating level. Inspect the TSF embankments for signs of concentrated runoff and erosion. Inspect the TSF embankments for indications of localized slumping or instability. Note areas of saturated or soft ground. Inspect surface water management ditches and sediment ponds along access roads.
Water levels rising in the TSF more than expected and within 2 ft. of the maximum operating level	Monitor pond levels Weekly. Develop plan to slow or stop the water level rise (stop tailings deposition, transfer water to the LAD Storage Pond and/or underground mine). Contact the EOR.
Water levels rising in the TSF more than expected and within 1 ft. of the maximum operating level	Monitor pond levels daily. Initiate plan to slow or stop the water level rise (stop tailings deposition, transfer water to the LAD Storage Pond and/or underground mine). Contact the EOR.
Significant earthquake event (See Note 1)	Read all instrumentation. Follow inspection and reporting procedures if instrumentation readings exceed trigger levels.
Rupture of tailings delivery, reclaim water or evaporator water supply pipelines	Stop pumping tailings to the TSF and stop reclaiming water to the mill. Check the upstream slope and crest for erosion. Take photographs and make notes of exact location and cause (if known) of leak. Contact the EOR.
Significant, rapid erosion of embankment slopes; Sudden seepage on embankment slope or downstream of embankment in form of continuous seepage or boils	Estimate seepage flow rate. Estimate size of area. Take photographs and make notes of exact location (if known) of erosion. Contact the EOR.
Minor surface erosion on embankment crest and/or slopes	Repair as necessary. Determine the cause of the erosion.
Soft toe condition or minor seepage at the downstream slope or toe	Conduct embankment walkovers daily until the problem is understood and addressed. Monitor seepage development (e.g. clarity, content/quality, extent etc.). Prepare to carry out corrective repairs. Contact the EOR if appropriate.
High turbidity in Basin Underdrain flow	Reduce or suspend underdrain pumping. Collect sample for suspended solids determination. Prepare to carry out corrective repairs. Contact the EOR if appropriate.
Extended power failure	Drain the reclaim water and tailings delivery pipelines if power failure occurs during extreme freezing temperatures. Flush the tailings delivery pipelines prior to restarting tailings deposition.
Exceedance of Level 2 instrumentation trigger levels	Refer to trigger levels in QRFG. Re-check the readings. Continue monitoring daily until readings return to normal. Contact the EOR if appropriate.
Failure of tailings delivery, reclaim water, or evaporator water supply pipelines resulting in erosion of the embankment crest	Document and repair as necessary. Monitor water levels daily. Ensure backup pumps are available. Repair or replace failed pumps ASAP.
Tailings Delivery Pipeline blocked	Stop tailings discharge. Flush pipeline with water to clear obstruction. Inspect the pipeline for damages or leaks. Determine the cause or reason for blockage.
Minor cracks developing at the embankment crest or slope	Conduct embankment walkovers daily until the problem is understood and addressed. Monitor crack development (e.g. crack size, extent, etc.). Prepare to carry out corrective repairs. Contact the EOR if appropriate.
Geomembrane damage due to unusual environmental occurrences (ice, wind, erosion damages, etc.)	Document the extent of the geomembrane damage. Identify a repair plan. Contact the Geomembrane Installer to complete the repairs.
Other events/observations	Use judgement, consult your peers.

I:\1101\000661491\A\Report\Hertzler TOMS Update - V1.7\App C - Inspection and Surveillance\Table C2.1 - Hertzler Unusual Events.xlsx|Table C2.1

NOTE:

1. A SIGNIFICANT EARTHQUAKE IS DEFINED AS AN EARTHQUAKE THAT COULD POTENTIALLY DISPLACE, DAMAGE OR CAUSE AN EMBANKMENT TO CRACK OR SETTLE, RESULTING IN A LOSS OF STRUCTURAL INTEGRITY OR FREEBOARD. THE OCCURRENCE OF AN EARTHQUAKE GREATER THAN MAGNITUDE 5.0 ON THE RICHTER SCALE WITHIN 60 MILES (100 KILOMETERS) OF THE FACILITY WILL AUTOMATICALLY TRIGGER A LEVEL 1 OR HIGHER CONDITION. ASSESSING AND REPORTING POTENTIAL DAMAGE CAUSED BY AN EARTHQUAKE WILL BE THE REQUIRED REMEDIAL ACTION.

Appendix C3

Inspection Forms

Table C3.1	Weekly Hertzler TSF Inspection
Table C3.2	Monthly Hertzler TSF Inspection
Table C3.3	Quarterly Hertzler TSF Inspection
Table C3.4	Hertzler TSF Inspection - Unusual Event Inspection

TABLE C3.1

SIBANYE STILLWATER
STILLWATER MINE

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
WEEKLY TSF INSPECTION
(Surface Supervisor or Surface Crew)

Print Jul-07-25 10:29:17

Inspectors:		Inspection Date:		Inspection Time:
Name:	Title:	Signature:		
Name:	Title:	Signature:		
Weather Conditions		Precipitation (24hr):	Wind Speed:	
		Temperature °F:	Sky: Clear Partly Cloudy Cloudy Overcast	
Samples Collected:		Yes No		
TAILINGS EMBANKMENT				
Crest of Dam	Condition/Issue/Defect Present (circle one)		Comments	
Cracking	Yes	No		
Subsidence, Depressions	Yes	No		
Lateral Deformation	Yes	No		
Standing Water or Wet Areas	Yes	No		
Upstream Slope				
Liner Trampoline (due to potential displacement of underlying subgrade)	Yes	No		
Liner Bulging (due to potential displacement of underlying subgrade)	Yes	No		
Excessive Ice Build-up and/or Snow Accumulation	Yes	No		
Ice Rafting on Geomembrane				
Downstream Slope				
Cracking	Yes	No		
Subsidence	Yes	No		
Bulging, Sliding or Sloughing	Yes	No		
Erosion	Yes	No		
Animal Burrows	Yes	No		
Damp Areas	Yes	No		
Seeps, Soft Areas	Yes	No		
TAILINGS BASIN				
Basin Filling	Condition/Issue/Defect Present (circle one)		Comments	
Tailings Beach Development (approx. area (ft.))				
Tailings Beach sinkholes or excessive erosion?	Yes	No		
Freeboard Minimum of 6 feet below Crest Required	Yes	No		
Pond Elevation (estimated from marked location (ft.))				
Tailings Discharge Location (Spigot No.)				
TAILINGS DELIVERY SYSTEM				
Pipelines	Condition/Issue/Defect Present (circle one)		Comments	
Pipeline Leakage (external inspection)	Yes	No		
Pipeline Damage (external inspection)	Yes	No		
Valves - Conditions/Issues Identified (external inspection)	Yes	No		
Maintenance Activities (repairs and replacements)				
WATER RECLAIM SYSTEM				
Pipelines and Pumps	Condition/Issue/Defect Present (circle one)		Comments	
Pipeline Leakage (external inspection)	Yes	No		
Pipeline Damage (external inspection)	Yes	No		
Valves - Conditions/Issues Identified (external inspection)	Yes	No		
Maintenance Activities (repairs and replacements)				
OTHER				
Other Issues or Observations Identified	Comments			

I:\11\01\00066149\1A\Report\Hertzler TOMS Update - V1.7\App C - Inspection and Surveillance\Table C3.1 to C3.4- Hertzler Inspection Log Templates.xlsx\Mill Wkly TSF Inspection_Hertz



TABLE C3.3

SIBANYE STILLWATER
STILLWATER MINE

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
QUARTERLY TSF INSPECTION
(Environmental Compliance Supervisor or Concentrator Manager)

Print Jul-07-25 10:29:17

Inspectors:		Inspection Date:		Inspection Time:	
Name:		Title:		Signature:	
Name:		Title:		Signature:	
Weather Conditions		Precipitation (24hr):		Wind Speed:	
		Temperature °F:		Sky: Clear Partly Cloudy Cloudy Overcast	
Photos Taken:		Yes No		Instrumentation Data Collected: Yes No	
Samples Collected:		Yes No		Data Collection Sheets Completed: Yes No	
TAILINGS EMBANKMENT					
Crest of Dam	Condition/Issue/Defect Present (circle one)		Comments		Photos Taken
Cracking	Yes	No			
Subsidence, Depressions	Yes	No			
Lateral Deformation	Yes	No			
Standing Water or Wet Areas	Yes	No			
Excessive Ice Build-up and/or Snow Accumulation	Yes	No			
Upstream Slope					
Liner Trampoline (due to potential displacement of underlying subgrade)	Yes	No			
Liner Bulging (due to potential displacement of underlying subgrade)	Yes	No			
Excessive Ice Build-up and/or Snow Accumulation	Yes	No			
Downstream Slope					
Cracking	Yes	No			
Subsidence	Yes	No			
Bulging, Sliding or Sloughing	Yes	No			
Erosion	Yes	No			
Animal Burrows	Yes	No			
Damp Areas	Yes	No			
Seeps, Soft Areas	Yes	No			
Vegetation (Reclamation)					
Wet Ground Vegetation	Yes	No			
Poor Growth	Yes	No			
Destroyed by Erosion	Yes	No			
Instrumentation					
Survey Monuments - Inspect Condition (damaged or maint needed)	Yes	No			
Piezometers - Inspect Condition (damaged or maint needed)	Yes	No			
Slope Inclinometers - Inspect Condition (damaged or maint needed)	Yes	No			
Areas of Previous Repair					
Concerns or Issues with Conditions	Yes	No			
TAILINGS BASIN					
Basin Filling	Condition/Issue/Defect Present/ Observation (circle one)		Comments		Photos Taken
Tailings Beach Development (approx. area (ft.))					
Tailings Beach sinkholes or excessive erosion?	Yes	No			
Freeboard Minimum of 6 feet below Crest Required	Yes	No			
Pond Elevation (estimated from marked location (ft.))					
Tailings Discharge Location (Spigot No.)					
Geomembrane					
Defects (holes, tears, ice, wind, uv degradation, etc.)	Yes	No			
Tension/Trampoline	Yes	No			
Areas of Previous Repair					
Concerns or Issues with Conditions	Yes	No			
Basin Underdrain					
Pump Operating	Yes	No			
Sump and Pumphouse (concerns or issues with conditions)	Yes	No			
Clarity of Discharge Water (WTP Sample Port)	Clear Cloudy Dirty				
Excessive Ice Buildup during Freezing Conditions	Yes	No			



TABLE C3.3

SIBANYE STILLWATER
STILLWATER MINE

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
QUARTERLY TSF INSPECTION
(Environmental Compliance Supervisor or Concentrator Manager)

Print Jul-07-25 10:29:17

TAILINGS DELIVERY SYSTEM				
Pipelines	Condition/Issue/Defect Present/Observation (circle one)		Comments	Photos Taken
Pipeline Leakage (external inspection)	Yes	No		
Pipeline Damage (external inspection)	Yes	No		
Valves - Conditions/Issues Identified (external inspection)	Yes	No		
Spigot Inspection (issue identified)	Yes	No		
Record Spigot Locations (Spigot No.)				
Excessive Ice Buildup during Freezing Conditions	Yes	No		
WATER RECLAIM SYSTEM				
Pipelines and Pumps	Condition/Issue/Defect Present (circle one)		Comments	Photos Taken
Pipeline Leakage (external inspection)	Yes	No		
Pipeline Damage (external inspection)	Yes	No		
Valves - Conditions/Issues Identified (external inspection)	Yes	No		
Pumps - Conditions/Issues Identified (external inspection)	Yes	No		
Inclined Pump Elevation (set elevation acceptable)	Yes	No		
Excessive Ice Buildup during Freezing Conditions	Yes	No		
SURFACE WATER MANAGEMENT (COMPLETED AS PART OF THE SWPPP)				
Ditches, Sediment Collection	Condition/Issue/Defect Present (circle one)		Comments	Photos Taken
Blockages	Yes	No		
Flowing Water, Boils or Seeps	Yes	No		
Signs of Erosion	Yes	No		
FENCING				
Fencing	Yes	No		
OTHER				
Other Issues or Observations Identified	Comments			Photos Taken

I:\1\01\00066\49\A\Report\Hertzler TOMS Update - V1.7\App C - Inspection and Surveillance\[Table C3.1 to C3.4- Hertzler Inspection Log Templates.xlsx]Env. or Mill Quarterly Insp.



TABLE C3.4

SIBANYE STILLWATER
STILLWATER MINE

HERTZLER TAILINGS OPERATIONS, MAINTENANCE AND SURVEILLANCE (TOMS) MANUAL
TSF INSPECTION - UNUSUAL EVENT INSPECTION
(Environmental Compliance Supervisor or Concentrator Manager)

Print Jul-07-25 10:29:17

Inspectors:		Inspection Date:		Inspection Time:	
Name:		Title:		Signature:	
Name:		Title:		Signature:	
Weather Conditions		Precipitation (24hr):		Wind Speed:	
		Temperature °F:		Sky: Clear Partly Cloudy Cloudy Overcast	
Photos Taken:		Yes	No	Instrumentation Data Reviewed: Yes No	
Samples Collected:		Yes	No		
Event		Comments		Photo	
EXTREME RAINFALL EVENT (2 inches in 24 hours)					
Monitor TSF Pond Level. Confirm Pond Level is below Maximum Operating Level					
Inspect Embankments for Signs of Concentrated Runoff and Erosion					
Inspect Embankments for Indications of Localized Slumping or Instability					
Note Areas of Saturated or Soft Ground					
Inspect Surface Water Management Ditches and Sediment Ponds along Access Roads					
TSF POND LEVEL WITHIN 2 ft. MAXIMUM OPERATING LEVEL					
Monitor Pond Level Weekly					
Develop Plan to Reduce Pond Level					
TSF POND LEVEL WITHIN 1 ft. MAXIMUM OPERATING LEVEL					
Monitor Pond Level Daily					
Initiate Plan to Reduce Pond Level					
SIGNIFICANT EARTHQUAKE EVENT (Magnitude greater than 5 within 60 miles)					
Review Instrumentation Readings					
Carry Out Detailed Walkover of TSF, Pipelines and Associated Structures if Instrumentation Trigger Levels are Exceeded					
Investigate Downstream and Upstream (visible) Slopes for Cracks, Bulging Settlement or Deformation					
Look for and note any Seepage, particularly the Rate of Seepage Flow at the Embankment Toe and Clarity					
Review all Surface Monument and Slope Inclinometer Readings					
Inspect Downstream Embankment slope for Sand Boils and Sinkholes					
Inspect Tailings Beach for Whirlpools					
Discuss findings with Engineer of Record					
Check and ensure that the Basin Underdrain Sumps and Pumps are Functioning					
RUPTURE OF PIPELINE AT THE EMBANKMENT					
Stop Pumping Tails to the TSF and Stop Reclaiming Water to Mill					
Check Upstream Slope and Crest for Erosion					
Take Photographs and make Notes of Exact Location and Cause of Erosion (if known), Contact EOR					
SIGNIFICANT EROSION OF THE EMBANKMENT SLOPES; SEEPAGE ON THE EMBANKMENT SLOPE OR DOWNSTREAM OF THE EMBANKMENT TOE					
Estimate Seepage Flow Rate. Estimate Size of Area.					
Take Photographs and make Notes of Exact Location and Cause (if known) of Erosion					
Contact the EOR					
SIGNIFICANT TEAR OR DEFECT IN GEOMEMBRANE					
Document Location and Extent of Tear/Defect					
Develop Repair Plan					
EXCEEDANCE OF INSTRUMENTATION TRIGGER LEVEL					
Embankment Inspection Observations					
OTHER OBSERVATIONS					

I:\11\01\00066\49\A\Report\Hertzler TOMS Update - V1.7\App C - Inspection and Surveillance\[Table C3.1 to C3.4- Hertzler Inspection Log Templates.xlsx]Unusual Events Insp.

Appendix D

Selected Site Photos

(Pages D-1 to D-10)

STILLWATER MINE SELECT SITE PHOTOS



PHOTO 1 – Overview of Hertzler TSF (May 2024).



PHOTO 2 – Overview of LAD Storage Pond (January 2024).

**STILLWATER MINE
SELECT SITE PHOTOS**



PHOTO 3 – North end of Hertzler TSF (May 2024).



PHOTO 4 – East Embankment upstream slope looking north (May 2024).

STILLWATER MINE SELECT SITE PHOTOS



PHOTO 5 – Southwest Embankment upstream slope (May 2024).



PHOTO 6 – Example survey monument (May 2024).

**STILLWATER MINE
SELECT SITE PHOTOS**



PHOTO 7 – West Embankment upstream slope with evaporators installed looking north (May 2024).



PHOTO 8 – Stage 3 vibrating wire piezometer readout location (May 2024).

STILLWATER MINE SELECT SITE PHOTOS



PHOTO 9 – Floating tailings discharge spigot (May 2024).



PHOTO 10 – Cell 1 Basin Underdrain Collection Sump and pumphouse (2015).

STILLWATER MINE SELECT SITE PHOTOS



PHOTO 11 – Cell 2 Basin Underdrain Collection Sump (2015).



PHOTO 12 – East Embankment downstream slope looking north (May 2024).

**STILLWATER MINE
SELECT SITE PHOTOS**



PHOTO 13 – West Embankment downstream (Nov. 2023).



PHOTO 14 – Tailings delivery pipeline on embankment crest (2022).

STILLWATER MINE SELECT SITE PHOTOS



PHOTO 15 – Evaporator installation on West Embankment Crest (2022).



PHOTO 16 – Water reclaim manifold and pipework (November 2023).

**STILLWATER MINE
SELECT SITE PHOTOS**



PHOTO 17 – North end of LAD Storage Pond (2022).



PHOTO 18 – South end of LAD Storage Pond (2022).

STILLWATER MINE SELECT SITE PHOTOS



PHOTO 19 – Mine water supply pipeline, north end of LAD Storage Pond (2022).



PHOTO 20 – LAD Storage Pond reclaim pipework and pumps (2022).

Appendix E

Tailings Deposition Plan

(Page E-1)

